website:http://biz.LGservice.com
e-mail:http://www.LGEservice.com/techsup.html

LCD TV
SERVICE MANUAL

CHASSIS : ML-041A

MODEL RZ-26LZ55

CAUTION
BEFORE SERVICING THE CHASSIS,
READ THE SAFETY PRECAUTIONS IN THIS MANUAL.

CONTENTS

CONTENTS 2

PRODUCT SAFETY 3

SPECIFICATION 6

ADJUSTMENT INSTRUCTION 10

TROUBLE SHOOTING 15

BLOCK DIAGRAM.....20

WIRING DIAGRAM 22

EXPLODED VIEW 23

EXPLODED VIEW PARTS LIST 24

REPLACEMENT PARTS LIST 25

SVC. SHEET .....

SAFETY PRECAUTIONS

IMPORTANT SAFETY NOTICE

Many electrical and mechanical parts in this chassis have special safety-related characteristics. These parts are identified by ⚠ in the Schematic Diagram and Replacement Parts List.
It is essential that these special safety parts should be replaced with the same components as recommended in this manual to prevent Shock, Fire, or other Hazards.
Do not modify the original design without permission of manufacturer.

General Guidance

An **isolation Transformer should always be used** during the servicing of a receiver whose chassis is not isolated from the AC power line. Use a transformer of adequate power rating as this protects the technician from accidents resulting in personal injury from electrical shocks.

It will also protect the receiver and it's components from being damaged by accidental shorts of the circuitry that may be inadvertently introduced during the service operation.

If any fuse (or Fusible Resistor) in this TV receiver is blown, replace it with the specified.

When replacing a high wattage resistor (Oxide Metal Film Resistor, over 1W), keep the resistor 10mm away from PCB.

Keep wires away from high voltage or high temperature parts.

Before returning the receiver to the customer,

always perform an **AC leakage current check** on the exposed metallic parts of the cabinet, such as antennas, terminals, etc., to be sure the set is safe to operate without damage of electrical shock.

Leakage Current Cold Check(Antenna Cold Check)
With the instrument AC plug removed from AC source, connect an electrical jumper across the two AC plug prongs. Place the AC switch in the on position, connect one lead of ohm-meter to the AC plug prongs tied together and touch other ohm-meter lead in turn to each exposed metallic parts such as antenna terminals, phone jacks, etc.
If the exposed metallic part has a return path to the chassis, the measured resistance should be between 1MΩ and 5.2MΩ.
When the exposed metal has no return path to the chassis the reading must be infinite.
An other abnormality exists that must be corrected before the receiver is returned to the customer.

Leakage Current Hot Check (See below Figure)
Plug the AC cord directly into the AC outlet.
Do not use a line Isolation Transformer during this check.
Connect 1.5K/10watt resistor in parallel with a 0.15uF capacitor between a known good earth ground (Water Pipe, Conduit, etc.) and the exposed metallic parts.
Measure the AC voltage across the resistor using AC voltmeter with 1000 ohms/volt or more sensitivity.
Reverse plug the AC cord into the AC outlet and repeat AC voltage measurements for each exposed metallic part. Any voltage measured must not exceed 0.75 volt RMS which is corresponds to 0.5mA.
In case any measurement is out of the limits specified, there is possibility of shock hazard and the set must be checked and repaired before it is returned to the customer.

Leakage Current Hot Check circuit

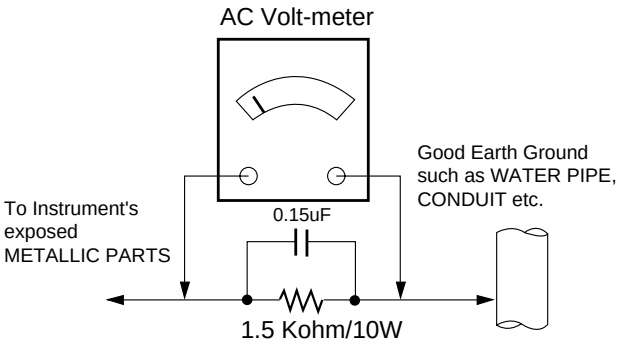

SERVICING PRECAUTIONS

CAUTION: Before servicing receivers covered by this service manual and its supplements and addenda, read and follow the *SAFETY PRECAUTIONS* on page 3 of this publication.

NOTE: If unforeseen circumstances create conflict between the following servicing precautions and any of the safety precautions on page 3 of this publication, always follow the safety precautions. Remember: Safety First.

General Servicing Precautions

1. Always unplug the receiver AC power cord from the AC power source before;
   a. Removing or reinstalling any component, circuit board module or any other receiver assembly.
   b. Disconnecting or reconnecting any receiver electrical plug or other electrical connection.
   c. Connecting a test substitute in parallel with an electrolytic capacitor in the receiver.
   CAUTION: A wrong part substitution or incorrect polarity installation of electrolytic capacitors may result in an explosion hazard.
2. Test high voltage only by measuring it with an appropriate high voltage meter or other voltage measuring device (DVM, FETVOM, etc) equipped with a suitable high voltage probe.
   Do not test high voltage by "drawing an arc".
3. Do not spray chemicals on or near this receiver or any of its assemblies.
4. Unless specified otherwise in this service manual, clean electrical contacts only by applying the following mixture to the contacts with a pipe cleaner, cotton-tipped stick or comparable non-abrasive applicator; 10% (by volume) Acetone and 90% (by volume) isopropyl alcohol (90%-99% strength)
   CAUTION: This is a flammable mixture.
   Unless specified otherwise in this service manual, lubrication of contacts in not required.
5. Do not defeat any plug/socket B+ voltage interlocks with which receivers covered by this service manual might be equipped.
6. Do not apply AC power to this instrument and/or any of its electrical assemblies unless all solid-state device heat sinks are correctly installed.
7. Always connect the test receiver ground lead to the receiver chassis ground before connecting the test receiver positive lead.
   Always remove the test receiver ground lead last.
8. *Use with this receiver only the test fixtures specified in this service manual.*
   CAUTION: Do not connect the test fixture ground strap to any heat sink in this receiver.

Electrostatically Sensitive (ES) Devices

Some semiconductor (solid-state) devices can be damaged easily by static electricity. Such components commonly are called *Electrostatically Sensitive (ES) Devices.* Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by static by static electricity.

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any electrostatic charge on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging wrist strap device, which should be removed to prevent potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static type solder removal device. Some solder removal devices not classified as "anti-static" can generate electrical charges sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.
   CAUTION: Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.
8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity sufficient to damage an ES device.)

General Soldering Guidelines

1. Use a grounded-tip, low-wattage soldering iron and appropriate tip size and shape that will maintain tip temperature within the range or 500 °F to 600 °F.
2. Use an appropriate gauge of RMA resin-core solder composed of 60 parts tin/40 parts lead.
3. Keep the soldering iron tip clean and well tinned.
4. Thoroughly clean the surfaces to be soldered. Use a mall wire-bristle (0.5 inch, or 1.25cm) brush with a metal handle.
   Do not use freon-propelled spray-on cleaners.
5. Use the following unsoldering technique
   a. Allow the soldering iron tip to reach normal temperature. (500 °F to 600 °F)
   b. Heat the component lead until the solder melts.
   c. Quickly draw the melted solder with an anti-static, suction-type solder removal device or with solder braid.
   CAUTION: Work quickly to avoid overheating the circuitboard printed foil.
6. Use the following soldering technique.
   a. Allow the soldering iron tip to reach a normal temperature (500 °F to 600 °F)
   b. First, hold the soldering iron tip and solder the strand against the component lead until the solder melts.
   c. Quickly move the soldering iron tip to the junction of the component lead and the printed circuit foil, and hold it there only until the solder flows onto and around both the component lead and the foil.
   CAUTION: Work quickly to avoid overheating the circuit board printed foil.
   d. Closely inspect the solder area and remove any excess or splashed solder with a small wire-bristle brush.

IC Remove/Replacement

Some chassis circuit boards have slotted holes (oblong) through which the IC leads are inserted and then bent flat against the circuit foil. When holes are the slotted type, the following technique should be used to remove and replace the IC. When working with boards using the familiar round hole, use the standard technique as outlined in paragraphs 5 and 6 above.

Removal

1. Desolder and straighten each IC lead in one operation by gently prying up on the lead with the soldering iron tip as the solder melts.
2. Draw away the melted solder with an anti-static suction-type solder removal device (or with solder braid) before removing the IC.

Replacement

1. Carefully insert the replacement IC in the circuit board.
2. Carefully bend each IC lead against the circuit foil pad and solder it.
3. Clean the soldered areas with a small wire-bristle brush. (It is not necessary to reapply acrylic coating to the areas).

"Small-Signal" Discrete Transistor Removal/Replacement

1. Remove the defective transistor by clipping its leads as close as possible to the component body.
2. Bend into a "U" shape the end of each of three leads remaining on the circuit board.
3. Bend into a "U" shape the replacement transistor leads.
4. Connect the replacement transistor leads to the corresponding leads extending from the circuit board and crimp the "U" with long nose pliers to insure metal to metal contact then solder each connection.

Power Output, Transistor Device Removal/Replacement

1. Heat and remove all solder from around the transistor leads.
2. Remove the heat sink mounting screw (if so equipped).
3. Carefully remove the transistor from the heat sink of the circuit board.
4. Insert new transistor in the circuit board.
5. Solder each transistor lead, and clip off excess lead.
6. Replace heat sink.

Diode Removal/Replacement

1. Remove defective diode by clipping its leads as close as possible to diode body.
2. Bend the two remaining leads perpendicular y to the circuit board.
3. Observing diode polarity, wrap each lead of the new diode around the corresponding lead on the circuit board.
4. Securely crimp each connection and solder it.
5. Inspect (on the circuit board copper side) the solder joints of the two "original" leads. If they are not shiny, reheat them and if necessary, apply additional solder.

Fuse and Conventional Resistor Removal/Replacement

1. Clip each fuse or resistor lead at top of the circuit board hollow stake.
2. Securely crimp the leads of replacement component around notch at stake top.
3. Solder the connections.
   CAUTION: Maintain original spacing between the replaced component and adjacent components and the circuit board to prevent excessive component temperatures.

Circuit Board Foil Repair

Excessive heat applied to the copper foil of any printed circuit board will weaken the adhesive that bonds the foil to the circuit board causing the foil to separate from or "lift-off" the board. The following guidelines and procedures should be followed whenever this condition is encountered.

At IC Connections

To repair a defective copper pattern at IC connections use the following procedure to install a jumper wire on the copper pattern side of the circuit board. (Use this technique only on IC connections).

1. Carefully remove the damaged copper pattern with a sharp knife. (Remove only as much copper as absolutely necessary).
2. carefully scratch away the solder resist and acrylic coating (if used) from the end of the remaining copper pattern.
3. Bend a small "U" in one end of a small gauge jumper wire and carefully crimp it around the IC pin. Solder the IC connection.
4. Route the jumper wire along the path of the out-away copper pattern and let it overlap the previously scraped end of the good copper pattern. Solder the overlapped area and clip off any excess jumper wire.

At Other Connections

Use the following technique to repair the defective copper pattern at connections other than IC Pins. This technique involves the installation of a jumper wire on the component side of the circuit board.

1. Remove the defective copper pattern with a sharp knife. Remove at least 1/4 inch of copper, to ensure that a hazardous condition will not exist if the jumper wire opens.
2. Trace along the copper pattern from both sides of the pattern break and locate the nearest component that is directly connected to the affected copper pattern.
3. Connect insulated 20-gauge jumper wire from the lead of the nearest component on one side of the pattern break to the lead of the nearest component on the other side. Carefully crimp and solder the connections.
   CAUTION: Be sure the insulated jumper wire is dressed so the it does not touch components or sharp edges.

SPECIFICATION

NOTE : Specifications and others are subject to change without notice for improvement.

1. Application range

This specification is applied to ML-041A chassis.

2. Requirement for Test

Testing for standard of each part must be followed in below condition.

(1) Temperature: 25°C ± 2°C
(2) Humidity: 65% ± 10%
(3) Power: Standard input voltage (AC 100-240V, 50/60Hz)
(4) Measurement must be performed after heat-run more than 30min.
(5) Adjusting standard for this chassis is followed a special standard.

3.General Specification(TV)

No	Item	Specification	Remark
1.	Video input applicable system	PAL-D/K, B/G, I, NTSC-M, SECAM NTSC 4.43	
2.	Receivable Broadcasting System	1) PAL/SECAM BG 2) PAL/SECAM DK 3) PAL I/I 4) SECAM L/L' 5) NTSC M	(RZ/RT) EU/Non-EU (PAL Market)
		6) PAL-N/M 7) NTSC M	6),7) South America Market 7) Except South America NTSC Market (RM)
3.	RF Input Channel	VHF : E2 ~ E12 UHF : E21 ~ E69 CATV : S1 ~ S20 HYPER : S21~ S41	PAL
		L/L' : B, C, D	FRANCE
		VHF : 2~13 UHF : 14~69 CATV : 1~125	NTSC
		VHF Low : 1 ~ M10 VHF High : 4~S22 UHF : S23~62	JAPAN
4.	Input Voltage	AC 100 ~ 240 V/50Hz, 60Hz	
5.	Market	Worldwide	
6.	Picture Size	660.40 mm	26 inch
7.	Tuning System	FVS 100 program FS	PAL,200 PR.(Option) NTSC
8.	Operating Environment	1) Temp : 0 ~ 40 deg 2) Humidity : 85 %	
9.	Storage Environment	3) Temp : -20 ~ 60 deg 4) Humidity : 85 %	
10.	Display	LCD Module	LPL, AUO

4. General Specification

NO	Item	Specification			Unit	Remark
1	Panel	26" TFT WXGA LCD				
2	Frequency range	H : 31 ~ 61Khz V : 56 ~ 75Hz				DVI-I input
3	Control Function	1) Contrast/Brightness 2) H-Position / V-Position 3) Tracking : Clock / Phase 4) Auto Configure 5) Reset				
4	Comoponent Jack	1 : Y 3 : Pb 5 : Pr 7 : Line1 Ready 9 : LINE2 11: LINE3 13: Line3 Ready				Middle east / NTSC Area
	D4 Jack (525i,525p,750p,1125i)	2 : Y GND 4 : Pb GND 6 : Pr GND 8 : LINE1 10:Line2 Ready 12:SWITCH GND 14: SWITCH				JAPAN Only
7		H/V-Sync	Video	Power consumption		LED
	Power ON	ON/ON	Active	≤ max 170W	W	Green
	Stand by	OFF/ON	OFF	≤ 3.0W	W	Red
	DPMS Mode	ON/OFF	OFF	≤ typ. 25W	W	Green
	Power off	-	-	-	W	*.
8	LCD Module	Type Size	LPL	622 x 389 x 53	mm	(H) x (V) x (D)
			AUO	620.8 x 389 x 37		
		Pixel Pitch	LPL	0.1475 x 0.4425 x RGB	mm	
			AUO	0.1475 x 0.4425 x RGB		
		Pixel Format	1280 horiz. By 768 vert. Pixels RGB strip arrangement			
		Coating	Hard coating(3H), Anti-glare treatment of the front polarizer,			
		Back Light	LPL	CCFL		
			AUO	CCFL		

5. Optical Feature(LCD Module)

No	Item	Specification						Remark
					LPL	AUO		
1	Viewing Angle <CR≥10>	R/L, U/D			176,176	TBD		
2	Luminance	Luminance (cd/m2)			450	600		Typical
		Variation			1.3			MAX / MIN
3	Contrast Ratio				500	600		All white / All black
4	CIE Color Coordinates	White	Xw	Typ.	0.284	0.285	0.289	LPL
			Yw	Typ.	0.285	0.293	0.303	
		RED	Xr	Typ.		TBD		
			Yr	Typ.		TBD		
		Green	Xg	Typ.		TBD		
			Yg	Typ.		TBD		
		Blue	Xb	Typ.		TBD		
			Yb	Typ.		TBD		

6.Feature and Function

No	Item	Specification	Remark
1.	Teletext	TOP, FLOF	Top(option)
2.	REMOCON	NEC Code	PAL/ NTSC
3.	AV Input	1	Rear(RT/RM)
4.	S-AV Input	1	Side
5.	Component input	2	Side, Rear (RT/RM),
6.	PERI TV Connector	Half SCART : 1	Rear (RZ)
7.	PERI TV Connector	Full SCART : 1	Rear (RZ)
8.	RGB Input	1	DVI
9.	RS-232	1	D-sub 9 pin (RM)
10.	Discrete IR	1	(RM)
11.	D-Sub Audio Input	1	Stereo
12.	2 Carrier Stereo	BG, DK	
13.	NICAM Stereo	BG, I, LL'	
14.	2 Carrier Dual	BG, DK	
15.	NICAM Dual	BG, I, LL'	
16.	DW(Double Window) Mode	X	
17.	MW(Multi Window) Mode	X	
18.	Film Mode	0	
19.	Noise Reduction	X	
20.	Progressive Scan	0	
21.	Motion Detection	0	
22.	SRS WOW	X	
23.	Swivel Speaker	X	
24	Ez-pip	X	
25	Local key	Pr+/-, vol+/-, ok, menu, tv/av, power	

7. Component Video Input(Y, P_B, P_R)

No	Specification				Proposed
	Resolution	H-freq(kHz)	V-freq(Hz)		
1.	640x480	15.73	60	SDTV, DVD 480i	RZ, RT, RM
2.	640x480	15.63	59.94	SDTV, DVD 480i	RZ, RT, RM
3.	704x480	31.47	59.94	EDTV 480p	RT, RM
4.	720x576	15.625	50.00	SDTV, DVD 625 Line	RZ, RT
5.	720x576	31.25	50.00	HDTV 576p	RT, RZ
6.	1280x720	45.00	60.00	HDTV 720p	RT, RM, RZ
7.	1280x720	44.96	59.94	HDTV 720p	RT, RM, RZ
8.	1280x720	37.5	50.00	HDTV 720p 50HZ	RT, RZ
9.	1920x1080	31.25 -> 28.125	50.00	HDTV 1080i 50Hz (Only AU)	RT, RZ
10.	1920x1080	33.75	60.00	HDTV 1080i 60Hz (ATSC)	RT, RM, RZ
11.	1920x1080	33.72	59.94	HDTV 1080i 59.94Hz	RT, RM, RZ

Input Side Comp 480i(RZ, RT, RM), 576I(RZ, RT), 720P_1080i(RZ55 Model Only)

8. PC Input Mode

No	Resolution	H-freq(kHz)	V-freq.(Hz)	Pixel clock(MHz)	Proposed
	DVI-PC, Analog RGB, Digital RGB				
1	640x480	31.469	59.94	25.17	VESA(VGA)
2	640x480	35	67	30.24	VESA(VGA)
3	640x480	37.500	75.00	31.50	VESA(VGA)
4	800x600	35.156	56.25	36.00	VESA(SVGA)
5	800x600	37.879	60.31	40.00	VESA(SVGA)
6	800x600	48.077	72.18	50.00	VESA(SVGA)
7	800x600	46.875	75.00	49.50	VESA(SVGA)
8	1024x768	48.363	60.00	65.00	VESA(XGA)
9	1024x768	56.476	70.06	75.00	VESA(XGA)
10	1024x768	60.023	75.02	78.75	VESA(XGA)
11	1280x768	47.693	60.00	80.125	VESA(WXGA)
12	1280x720	45.00	60.00	74.375	HDCP DVI Digital 720p (RM only)
13	1920x1080	33.75	60.00	86.375	HDCP DVI Digital 1080i(RM only)

ADJUSTMENT INSTRUCTION

1. Application

This document is applied to 23"26"32" Wide LCD TV which is manufactured in Monitor Factory or is produced on the basis of this data.

2. Designation

2.1 The adjustment is according to the order which is designated and which must be followed, according to the plan which can be changed only on agreeing.
2.2 Power Adjustment : Free Voltage
2.3 Magnetic Field Condition: Nil.
2.4 Input signal Unit : Product specification standard
2.5 Reserve after operation : Above 2 hours
2.6 Adjustment equipments : Pattern Generator (MSPG925F), DDC Adjustment Jig equipment, HDCP Adjustment Jig equipment.

3. Adjustments

3.1 Adjustment Details

The machine can be adjusted by itself automatically with factory automatic equipment, in case error occurs, set manual adjustment to standard.

3.2 Adjustment signal Composition of The Auto Adjustment equipment

3.2.1 RS-232C Interchange
9600bps, Pin#2 : Rx, Pin#3 : Tx, 8bit, STOP bit=1, No Parity

3.2.2 Adjust data save
* Save the adjusted data to the EEPROM with default value

```
ai - 0 - 00
```

3.2.3 Adjust OK

```
ak - 0 - 00
```

3.2.4 Screen Adjustment Instruction Forms
CMD1 CMD2 SetID(0) Value
a. CMD1,CMD2 : Instructions operated by Monitor
b. SetID L 0h Set always 0 in Adjustment
VALUE : Adjustment Value

3.2.5 Screen Adjustment Instructions

	Adjustment Content	CMD(ASCII)	VALUE(hex)	Detail Explanation
1	Mode Select	Kb	10, 20, 30, 40, 50	00 : RF(TV) 02: AV1 03 : S-Video 04 : Component 1 06 : PC
2	Sub Brightness	Ah	00 ~ 0X64	
3	Sub Contrast	Ag	00 ~ 0X64	
4	R _ Offset Adjustment	Aa	00 ~ 7f	
5	G _ Offset Adjustment	Ab	00 ~ 7f	
6	B _ Off\set Adjustment	Ac	00 ~ 7f	
7	R _ Gain Adjustment	Ad	00 ~ ff	
8	G _ Gain Adjustment	Ae	00 ~ ff	
9	B _ Gain Adjustment	Af	00 ~ ff	The data which is adjusted store
10	Adjust Data Save	ai	00	The signal Adjustment was
11	Adjust OK	ak	00	completed

3.3 PC signal Gain/Offset Adjustment (Execute first of all in adjustment process)

3.3.1 Adjustment Preparation
- Execution of RF no signal during Heat Run over 30min
- Pattern generator signal is connected to the DVI-I Jack of LCD TV.

3.3.2 Auto Gain/Offset Adjustment
(Input signal Level : 730mV)
- To use Pattern Generator(MSPG925FS), Apply Model 37, Patten 19 (XGA(1024 X 768)60Hz, white/black top and bottom pattern signal (Don't apply 16 gray signal)
- Press IN-START Key by using the Remote Controller (SVC) , after converting to Adjustment-Mode, press VOL+ Key consecutively in Auto-Gain Menu.
- After adjustment is complete, pressing enter key, stores and completes the process.

3.4 Video signal Gain/Offset Adjustment (Auto adjustment)

- Execution of RF no signal during Heat Run over 30min
- Connect to the LCD TV SCART input terminal with Patten Generator(MSPG-925FS)
- Convert INPUT MODE to S-Video or AV1.
- Connect RS-232C Communication Cable to the Auto Adjustment Equipment and SET's upgrade Port

3.4.1 Low Gray Adjustment

- Apply Gray-Level(Model : 202 PAL_BDGH, pattern : 59) signal by using Pattern Generator(MSPG-925FS)
- heck weather color-coordinates 23" & 26" & 32"AUO (x: 0.283, y:0.298, ±0.005), 32"LPL(x:0.280, y:0.290, ±0.005), 32"CMO(x:0.270, y:0.285, ±0.005), 26" AUO (x:0.280, y: 0.285, ±0.005) is operated by using CA-110 equipment
- If color-coordinates is not in Spec, adjust color-coordinates 23" & 26" & 32"AUO (x: 0.283, y:0.298, ±0.005), 32"LPL (x:0.280, y:0.290, ±0.005), 32"CMO(x:0.270, y:0.285, ±0.005), 26" AUO (x:0.280, y:0.285, ±0.005) by adjusting Red Offset, Blue Offset

3.4.2 White Balance Adjustment

- Apply 95% White (Model : 202 PAL_BDGH, pattern : 47, luminance spec : 250cd/m^2 over) signal by using Patten Generator(MSPG925FS)
- Check whether color-coordinates(x:0.283, y:0.298, ±0.005) is operated by using CA-110 equipment
- If color-coordinates is not in Spec, adjust color-coordinates(x:0.283, y:0.298, ±0.005) by adjusting Red Gain, Blue Gain
- All adjustment takes color-coordinates with based on G, changing R and B. If it is not adjusted, adjust with fixed B, changing G and R.

3.5 Component signal Gain/Offset Adjustment (Auto adjustment)

- Execution of RF no signal during Heat Run over 30min
- Connect to the LCD TV Component1 terminal with Patten Generator(MSPG-925FS)
- Convert INPUT MODE to Component1.
- Connect RS-232C Communication Cable to the Auto Adjustment Equipment and SET's upgrade Port

3.5.1 Low Gray Adjustment

- Apply Gray-Level(Model : 210 576i, pattern : 59) signal by using Patten Generator(MSPG925FS)
- Check whether color-coordinates 23" & 26" & 32"AUO (x: 0.283, y:0.298, ±0.005), 32"LPL(x:0.280, y:0.290, ±0.005), 32"CMO(x:0.270, y:0.285, ±0.005), 26" AUO (x:0.280, y:0.285, ±0.005) is operated by using CA-110 equipment
- If color-coordinates is not in Spec, adjust color-coordinates 23" & 26" & 32"AUO (x:0.283, y:0.298, ±0.005), 32"LPL (x:0.280, y:0.290, ±0.005), 32"CMO(x:0.270, y:0.285, ±0.005) , 26" AUO (x:0.280, y:0.285, ±0.005) by adjusting Red Offset, Blue Offset

3.5.2 White Balance Adjustment

- Apply 95% White(Model:210 576i, pattern : 47, luminance spec : 250cd/m^2 over) signal by using Patten Generator (MSPG925FS)
- Check whether color-coordinates(x:0.283, y:0.298, ±0.005) is operated by using CA-110 equipment
- If color-coordinates is not in Spec, adjust color-coordinates(x: 0.283, y:0.298, ±0.005) by adjusting Red Gain, Blue Gain
- All adjustment takes color-coordinates with based on G, changing R and B. If it is not adjusted, adjust with fixed B, changing G and R.

4. EDID (The Extended Display Identification Data) SETTING

- Connect D-Sub to DVI-I Cable to DVI-I Jack.
- Input analog signal and check pc video in the screen.
- After appearing the pc video, write Analog EDID data.
- Connect DVI D Cable to DVI Jack.
- Input digital signal and check pc video in the screen.
- After appearing the pc video, write digital EDID data.

[DDC DATA Analog Set]

	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F
00	00	FF	FF	FF	FF	FF	FF	00	1E	6D	FF	55	01	01	01	01
10	0C	0E	01	03	18	46	2B	78	EE	E8	AA	A1	57	49	9C	25
20	10	48	4B	AB	8C	00	45	4F	61	4F	81	CF	01	01	01	01
30	01	01	01	01	01	01	40	1F	00	90	51	00	1B	30	40	88
40	37	00	BC	AE	21	00	00	1C	00	00	00	FD	00	38	4B	1F
50	3D	0A	00	0A	20	20	20	20	20	20	00	00	00	FC	00	52
60	5A	32	36	4C	5A	35	35	0A	20	20	20	20	00	00	00	FC
70	00	0A	20	20	20	20	20	20	20	20	20	20	20	20	00	F9

[DDC DATA Digital Set]

	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F
00	00	FF	FF	FF	FF	FF	FF	00	1E	6D	00	56	01	01	01	01
10	0C	0E	01	03	98	46	2B	96	EE	E8	AA	A1	57	49	9C	25
20	10	48	4B	BF	EE	00	31	40	3B	CA	45	40	61	40	81	C0
30	81	CF	01	01	01	01	40	1F	00	90	51	00	1B	30	40	88
40	37	00	BC	AE	21	00	00	1C	00	00	00	FD	00	38	4B	1F
50	3D	0A	00	0A	20	20	20	20	20	20	00	00	00	FC	00	52
60	5A	32	36	4C	5A	35	35	0A	20	20	20	20	00	00	00	FC
70	00	0A	20	20	20	20	20	20	20	20	20	20	20	20	00	50

5. Shipping Conditions

No	Item			Condition	Remark
1	Power			Off	
2	Volume Level			30	
3	Main Picture Input			TV	
4	Main Last Channel			Pr 01	
5	Mute			Off	
6	ARC			16 : 9	
7	Station	Auto Program			
		Manual Program			
		Program Edit			
		Favorite Program		None	
8	Picture	PSM		Dynamic	
		Dynamic	Contrast	80	
			Brightness	40	
			Colour	70	
			Sharpness	70	
			Tint	0	NTSC OPTION
9	Sound	SSM		Flat	
		AVL		Off	
		Balance		0	
10	Special	Input		TV	
		Child Lock		Off	
		Auto sleep		Off	
		Language		English(Area Management)	
11	PC	H-Position		Variable by each mode	
		V-Position			
		Clock			
		Phase			
		Auto Configure			

OPTION DATA SETTING(PAL)

No	Item	Condition	Remark
Option1			
1	SideAV	1	0 : SideAV Off 1 : SideAV On
2	SCART	1	0 : SCART Off 1 : SCART On
3	PC	1	0 : PC Off 1 : PC On
4	SideComp	1	0 :SideComp Off 1 :SideComp ON
5	16:9	1	0 : Wide OFF 1 : Wide On
6	200PR	0	0 : 100 Program 1 : 200 Program
7	Text	1	0 : Text Off 1 : Text On
8	ACMS	1	0 : ACMS On 1 : ACMS Off
Option2			
1	HiDev	0	0 : HiDev Off 1 : HiDev On
2	Hotel	0	0 : Hotel Off 1 : Hotel On
3	Top	1	0 : Top OFF 1 : Top ON
4	I II SAVE	1	0 : Ch. Sound Non Memory 1 : Ch. Sound Memory
5	Turbo Vol	0	0 : except below area(Off) 1 : Middle-East Area Vol On
6	Ch/Aus	0	0 : except below area(Off) 1 : China, Australia On

Option3			
1	Language	1	0 : Eng Only 1 : EU5 2 : 12 nations (Europe) 3 : Eng + Chinese 4 : Eng + Arab + Urdu 5 : Eng + FARSI
2	Txt Lang	0	0 : WEST EU 1 : EAST EU1 2 : TURKY EU 3 : EAST EU2 4 : CYRILLIC1 5 : CYRILLIC2 6 : CYRILLIC3 7 : TURK GRE1 8 : TURK GRE2 9 : TURK GRE3 10 :ARAB FRAN 11 :ARAB ENG 12 :ARAB HEB1 13 :ARAB HEB2 14 :FARSI ENG 15 :FARSI FRA 16 :FARI ALL
3	Inch opt	0	reserved
4	DDCi	Analog	Analog : Analog Digital : Digital

SVC REMOCON

NO	KEY	FUNTION	REAMARK
1	POWER	To turn the TV on or off	
2	POWER ON	To turn the TV on automatically if the power is supplied to the TV. (Use the POWER key to deactivate): It should be deactivated when delivered.	
3	MUTE	To activate the mute function.	
4	P-CHECK	To check TV screen image easily.	Shortcut keys
5	S-CHECK	To check TV screen sound easily	Shortcut keys
6	ARC	To select size of the main screen (Normal, Spectacle, Wide or Zoom)	Shortcut keys
7	CAPTION	Switch to closed caption broadcasting	
8	TXT	To toggle on/off the teletext mode	
9	TV/AV	To select an external input for the TV screen	
10	TURBO SOUND	To start turbo sound	
11	TURBO PICTURE	To start turbo picture	
12	IN-START	To enter adjustment mode when manufacturing the TV sets. To adjust the screen voltage (automatic): In-start → mute → Adjust → AV(Enter into W/B adjustment mode) W/B adjustment (automatic): After adjusting the screen → W/B adjustment → Exit two times (Adjustment completed)	Use the AV key to enter the screen W/B adjustment mode.
13	ADJ	To enter into the adjustment mode. To adjust horizontal line and sub-brightness.	
14	MPX	To select the multiple sound mode (Mono, Stereo or Foreign language)	
15	EXIT	To release the adjustment mode	
16	APC(PSM)	To easily adjust the screen according to surrounding brightness	
17	ASC(SSM)	To easily adjust sound according to the program type	
18	MULTIMIDIA	To check component input	Shortcut keys
19	FRONT-AV	To check the front AV	Shortcut keys
20	CH ±	To move channel up/down or to select a function displayed on the screen.	
21	VOL ±	To adjust the volume or accurately control a specific function.	
22	ENTER	To set a specific function or complete setting.	
23	PIP CH-(OP1)	To move the channel down in the PIP screen. To use as a red key in the teletext mode	
24	PIP CH+(OP2)	To move the channel in the PIP screen To use as a green key in the teletext mode	
25	PIP SWAP(OP3)	To switch between the main and sub screens To use as a yellow key in the teletext mode	
26	PIP INPUT(OP4)	To select the input status in the PIP screen To use as a blue key in the teletext mode	
27	EYE	To set a function that will automatically adjust screen status to match the surrounding brightness so natural color can be displayed.	
28	MENU	To select the functions such as video, voice, function or channel.	
29	IN-STOP	To set the delivery condition status after manufacturing the TV set.	
30	STILL	To halt the main screen in the normal mode, or the sub screen at the PIP screen. Used as a hold key in the teletext mode (Page updating is stopped.)	
31	TIME	Displays the teletext time in the normal mode Enables to select the sub code in the teletext mode	
32	SIZE	Used as the size key in the PIP screen in the normal mode Used as the size key in the teletext mode	
33	MULTI PIP	Used as the index key in the teletext mode (Top index will be displayed if it is the top text.)	
34	POSITION	To select the position of the PIP screen in the normal mode Used as the update key in the teletext mode (Text will be displayed if the current page is updated.)	
35	MODE	Used as Mode in the teletext mode	
36	PIP	To select the simultaneous screen	
37	TILT	To adjust screen tilt	Shortcut keys
38	0~9	To manually select the channel.	

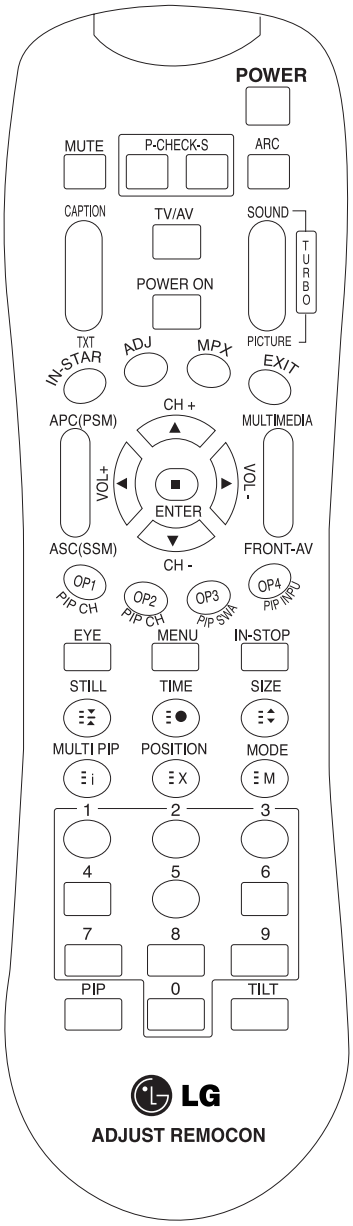

TROUBLESHOOTING

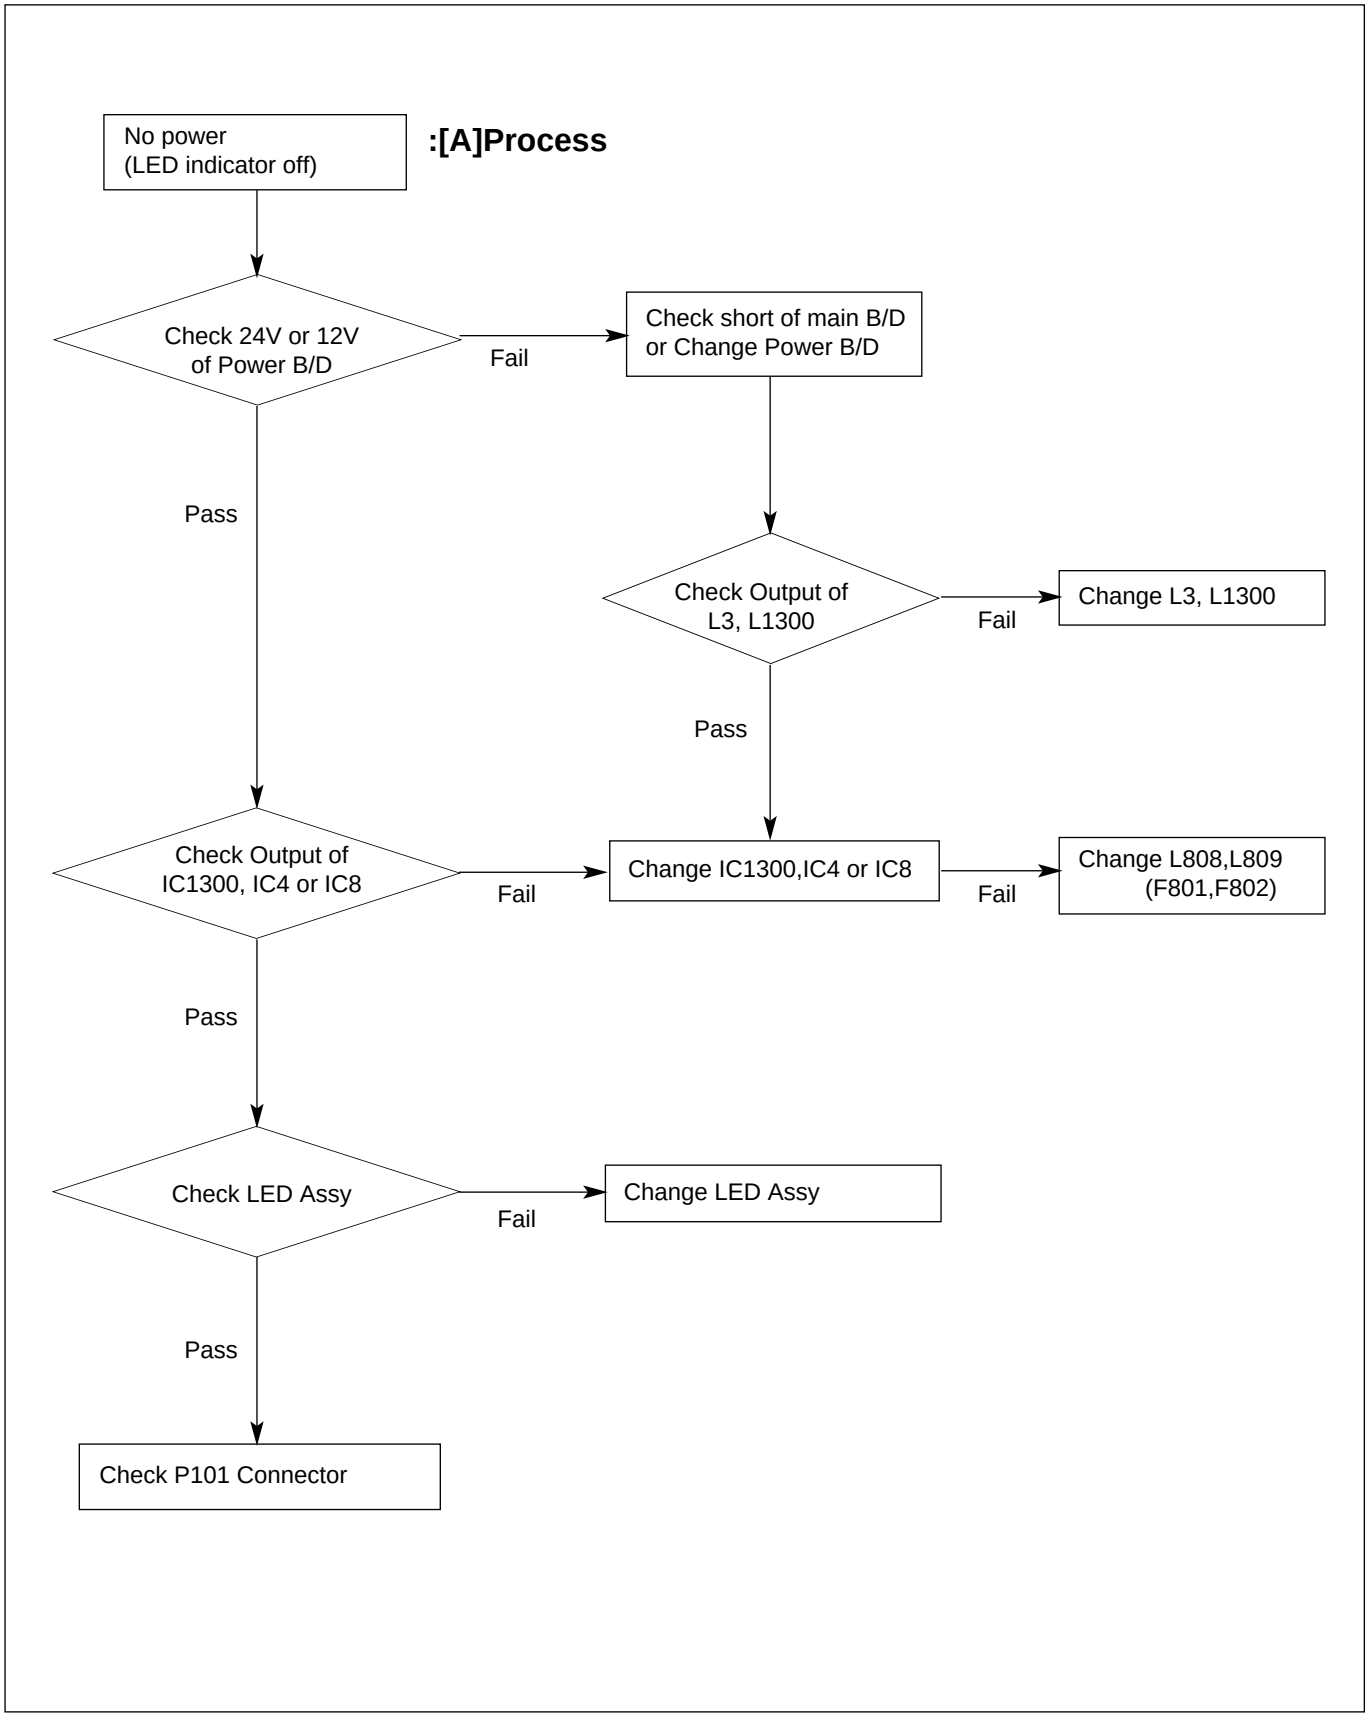

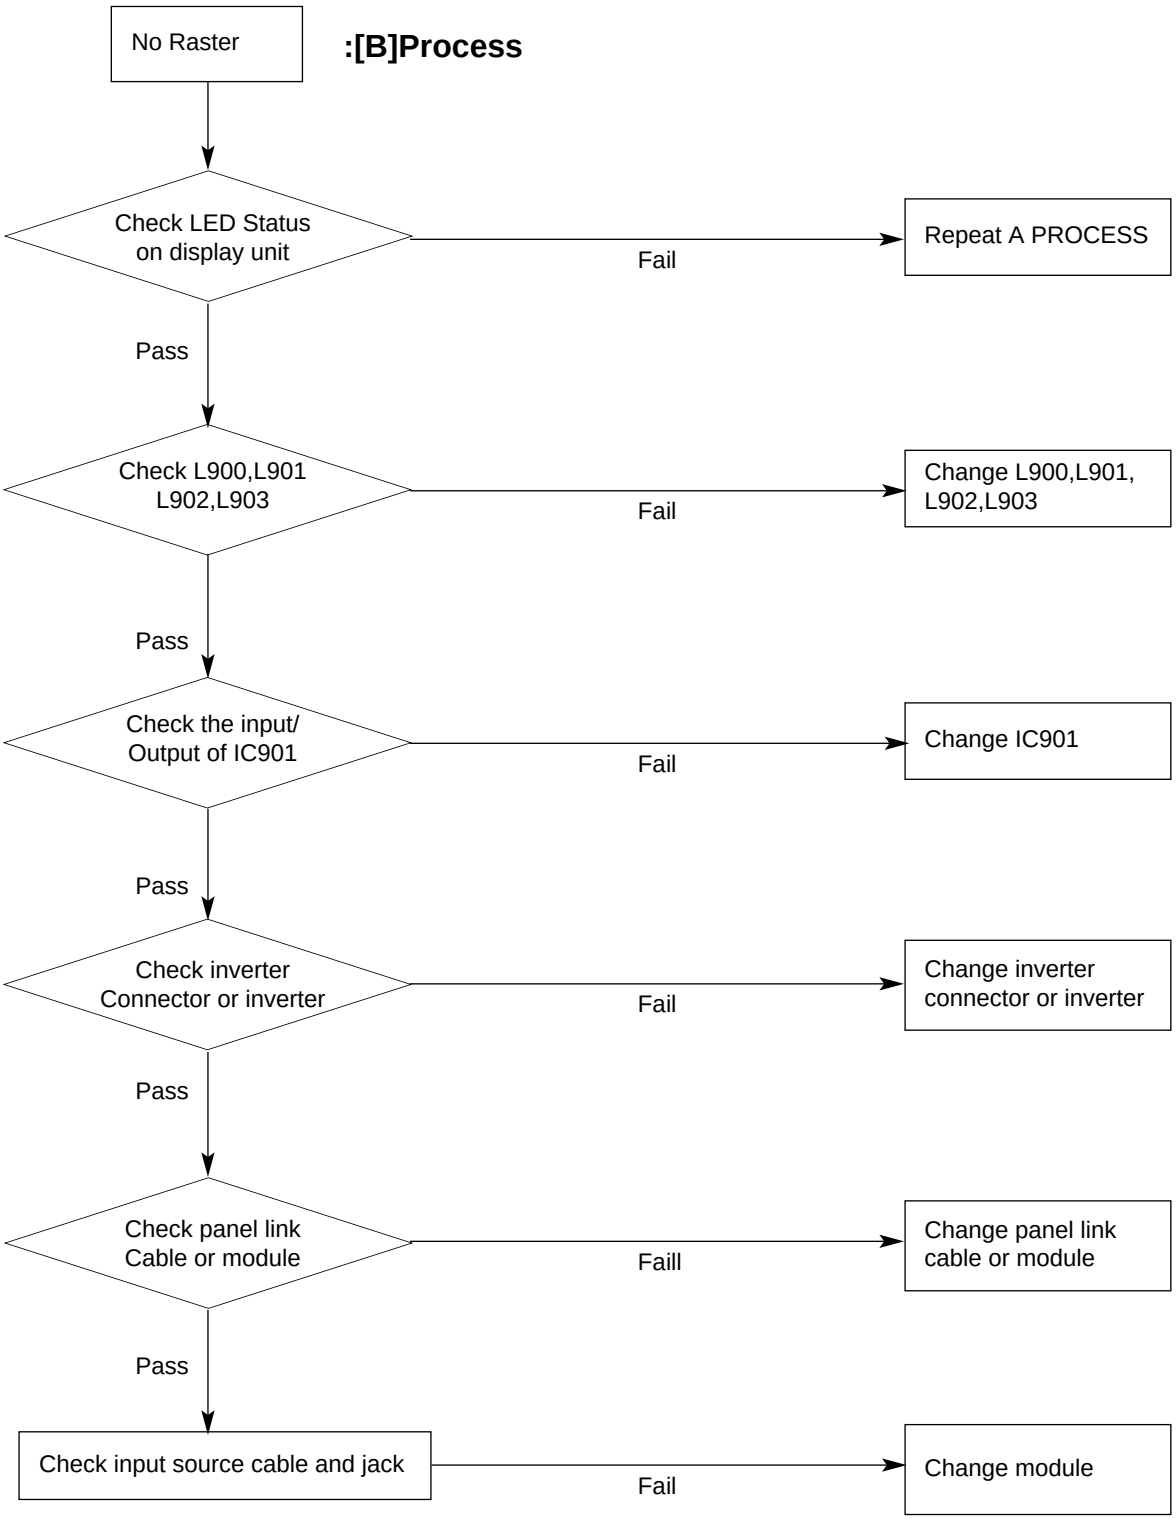
No Raster
:[B]Process
Check LED Status on display unit
Fail
Repeat A PROCESS
Pass
Check L900,L901 L902,L903
Fail
Change L900,L901, L902,L903
Pass
Check the input/ Output of IC901
Fail
Change IC901
Pass
Check inverter Connector or inverter
Fail
Change inverter connector or inverter
Pass
Check panel link Cable or module
Faill
Change panel link cable or module
Pass
Check input source cable and jack
Fail
Change module

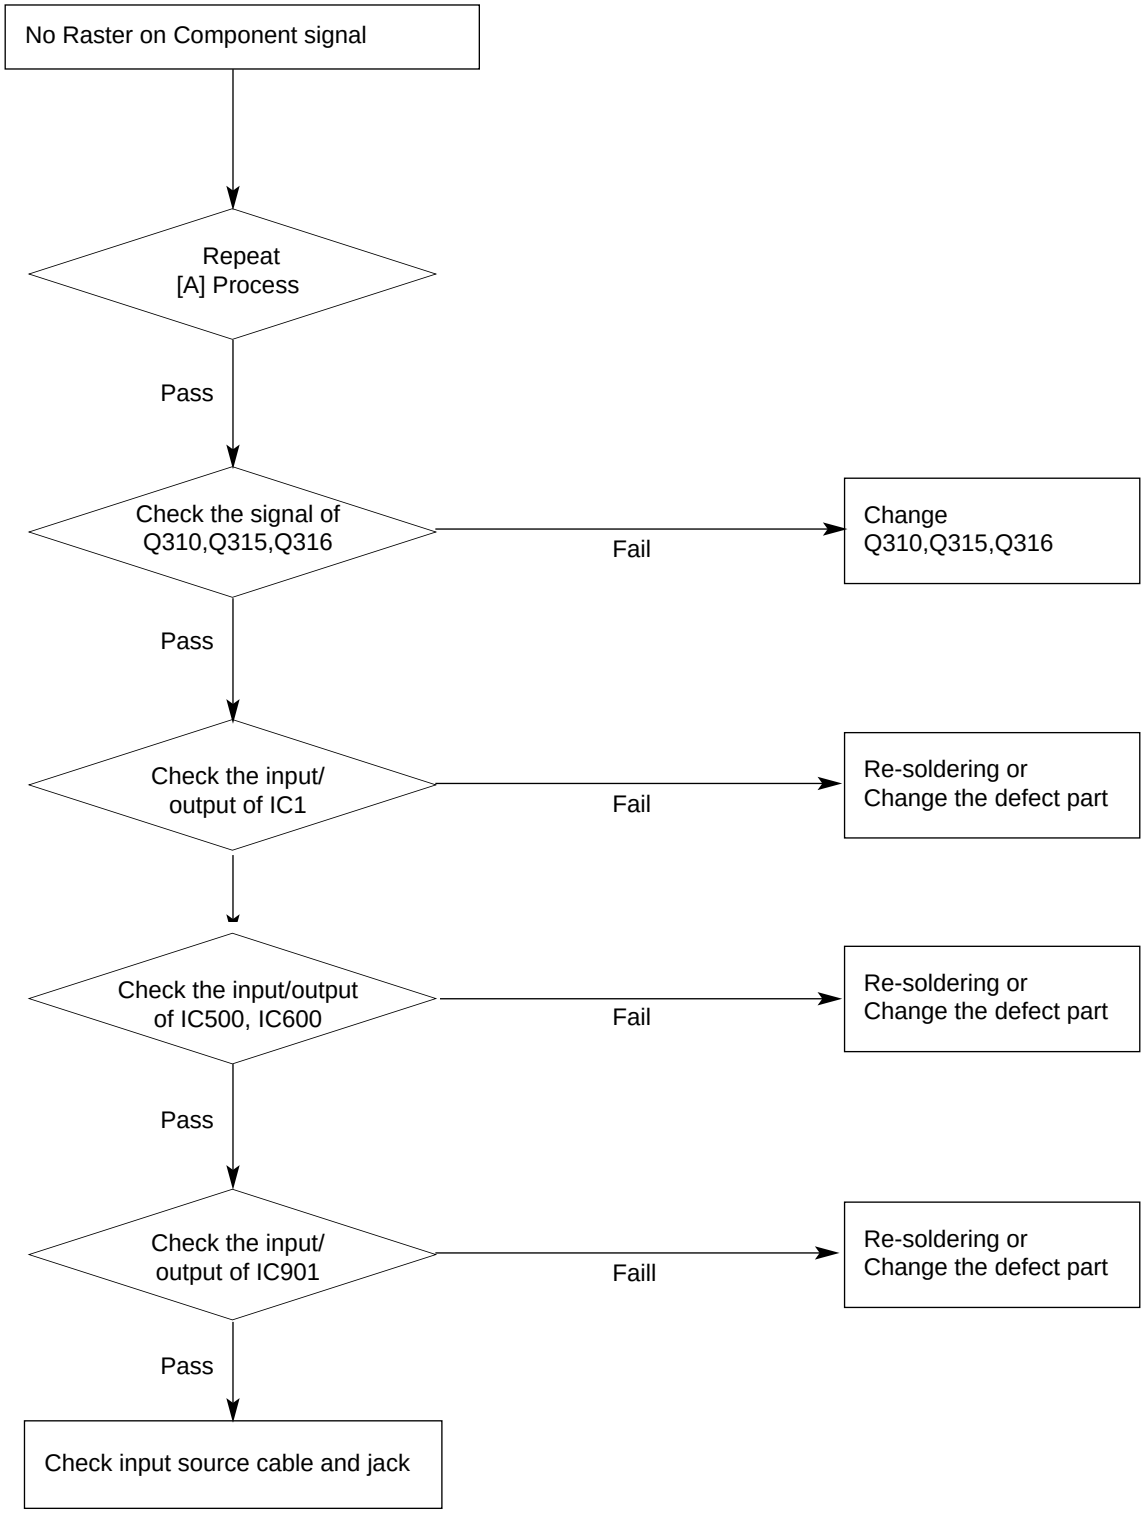
No Raster on Component signal
Repeat
[A] Process
Pass
Check the signal of
Q310,Q315,Q316
Fail
Change
Q310,Q315,Q316
Pass
Check the input/
output of IC1
Fail
Re-soldering or
Change the defect part
Check the input/output
of IC500, IC600
Fail
Re-soldering or
Change the defect part
Pass
Check the input/
output of IC901
Faill
Re-soldering or
Change the defect part
Pass
Check input source cable and jack

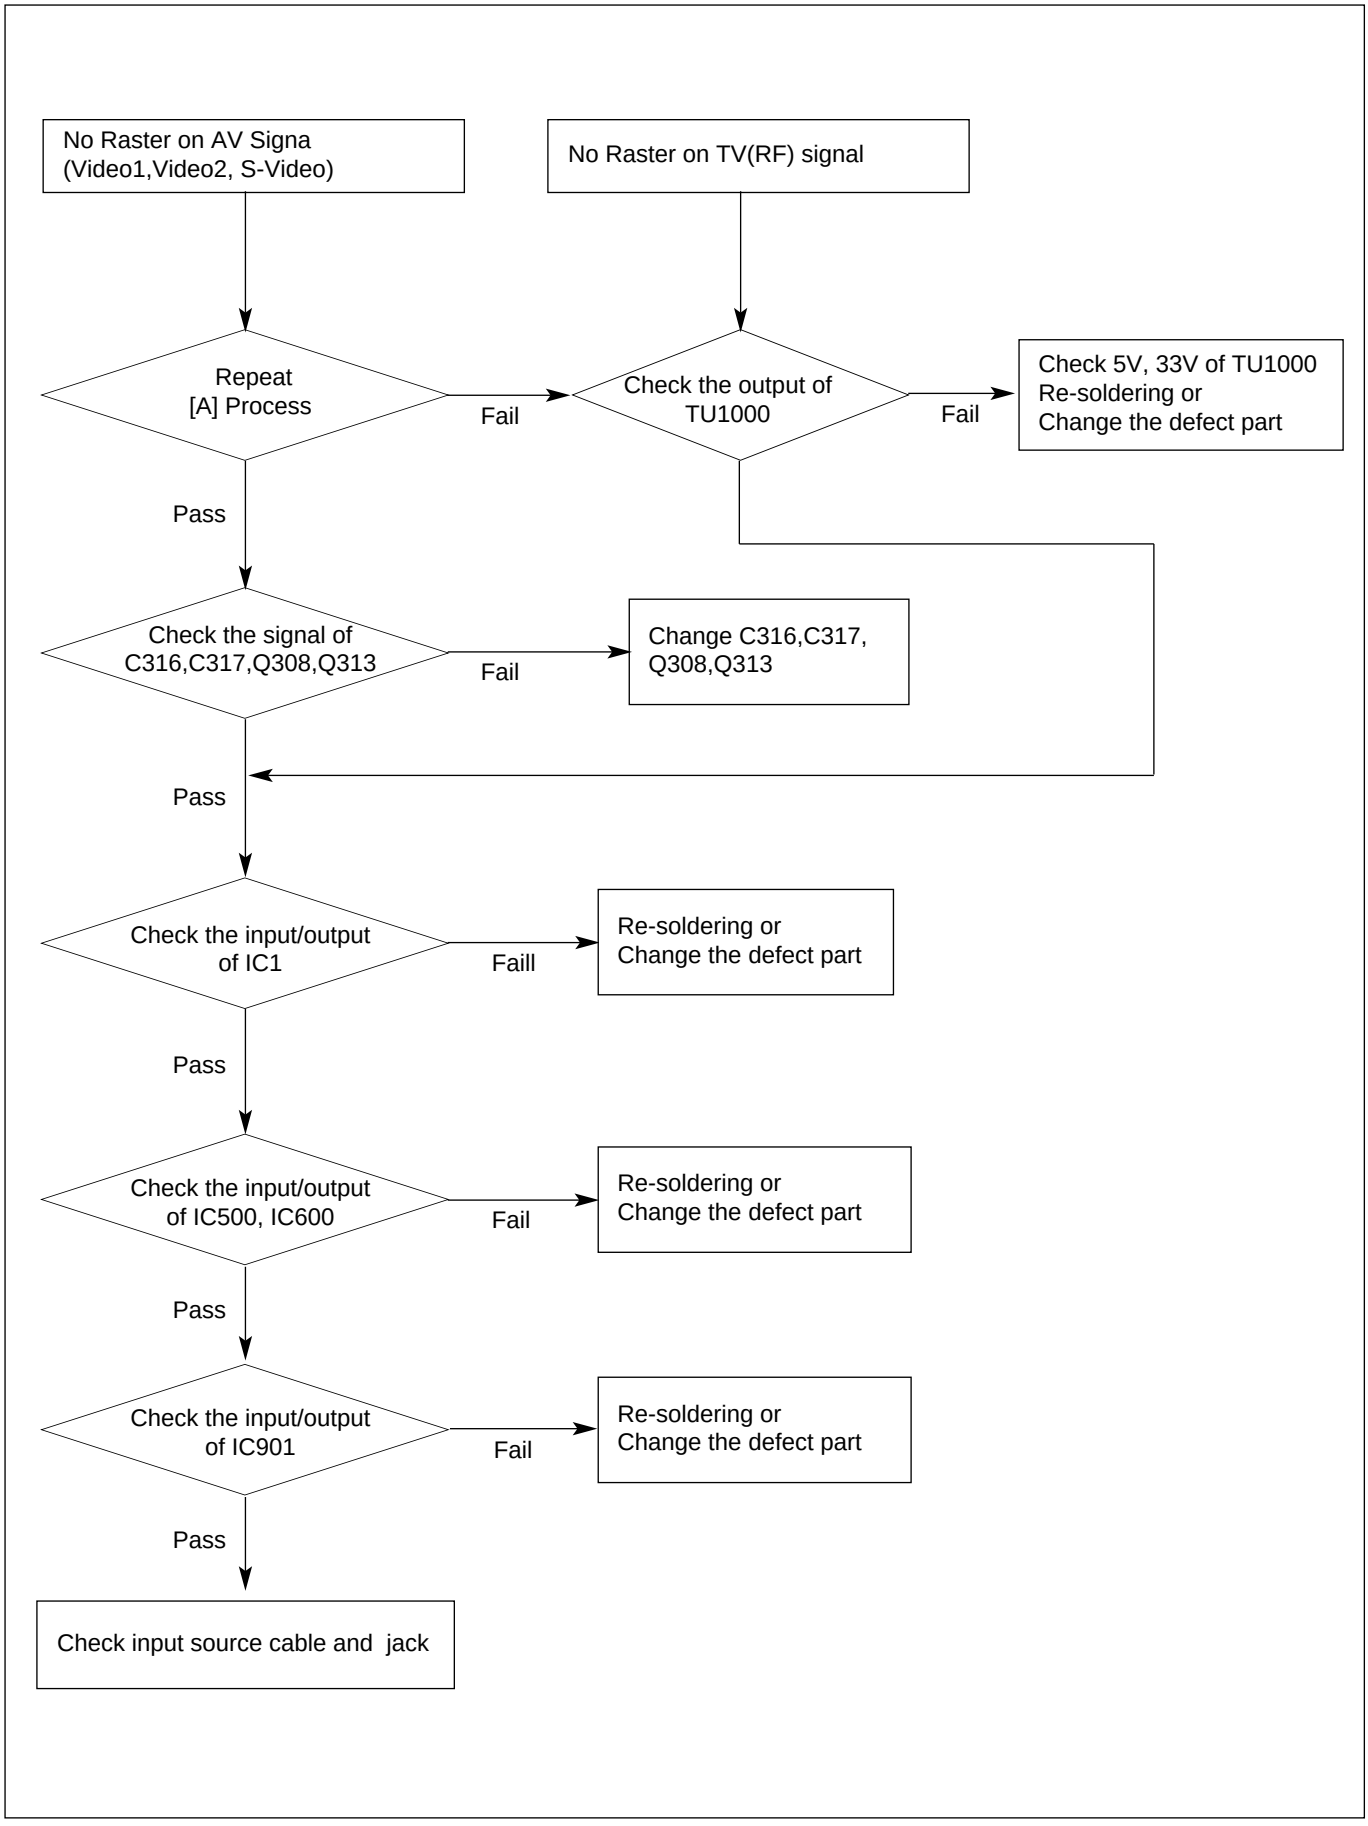
No Raster on AV Signa
(Video1,Video2, S-Video)
No Raster on TV(RF) signal
Repeat
[A] Process
Fail
Check the output of
TU1000
Fail
Check 5V, 33V of TU1000
Re-soldering or
Change the defect part
Pass
Check the signal of
C316,C317,Q308,Q313
Fail
Change C316,C317,
Q308,Q313
Pass
Check the input/output
of IC1
Faill
Re-soldering or
Change the defect part
Pass
Check the input/output
of IC500, IC600
Fail
Re-soldering or
Change the defect part
Pass
Check the input/output
of IC901
Fail
Re-soldering or
Change the defect part
Pass
Check input source cable and jack

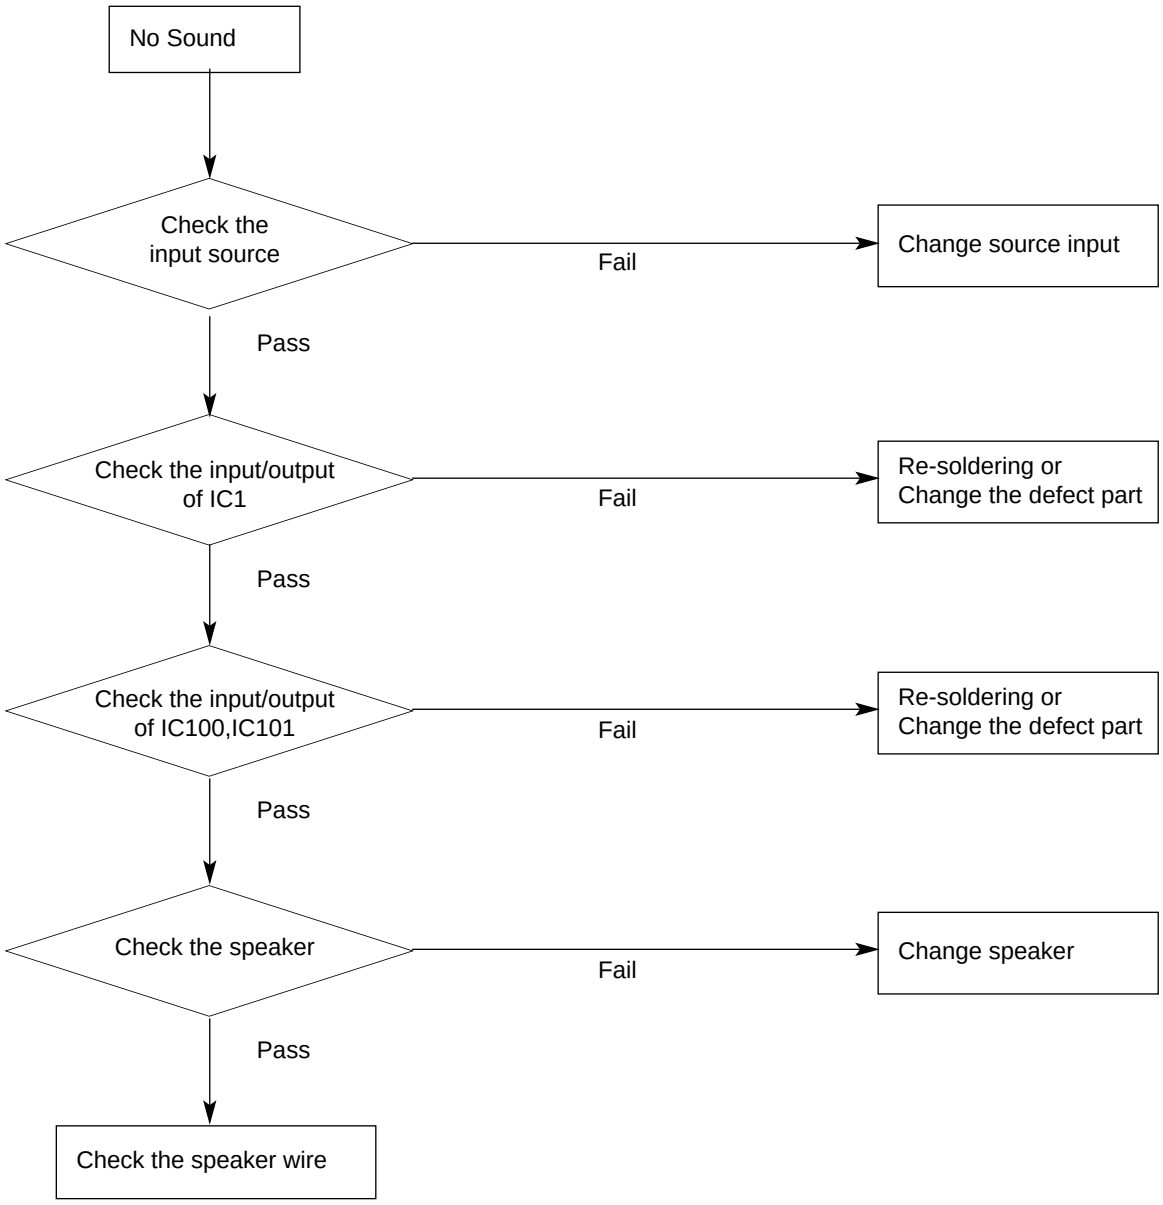
No Sound
Check the input source
Fail
Change source input
Pass
Check the input/output of IC1
Fail
Re-soldering or Change the defect part
Pass
Check the input/output of IC100,IC101
Fail
Re-soldering or Change the defect part
Pass
Check the speaker
Fail
Change speaker
Pass
Check the speaker wire

BLOCK DIAGRAM

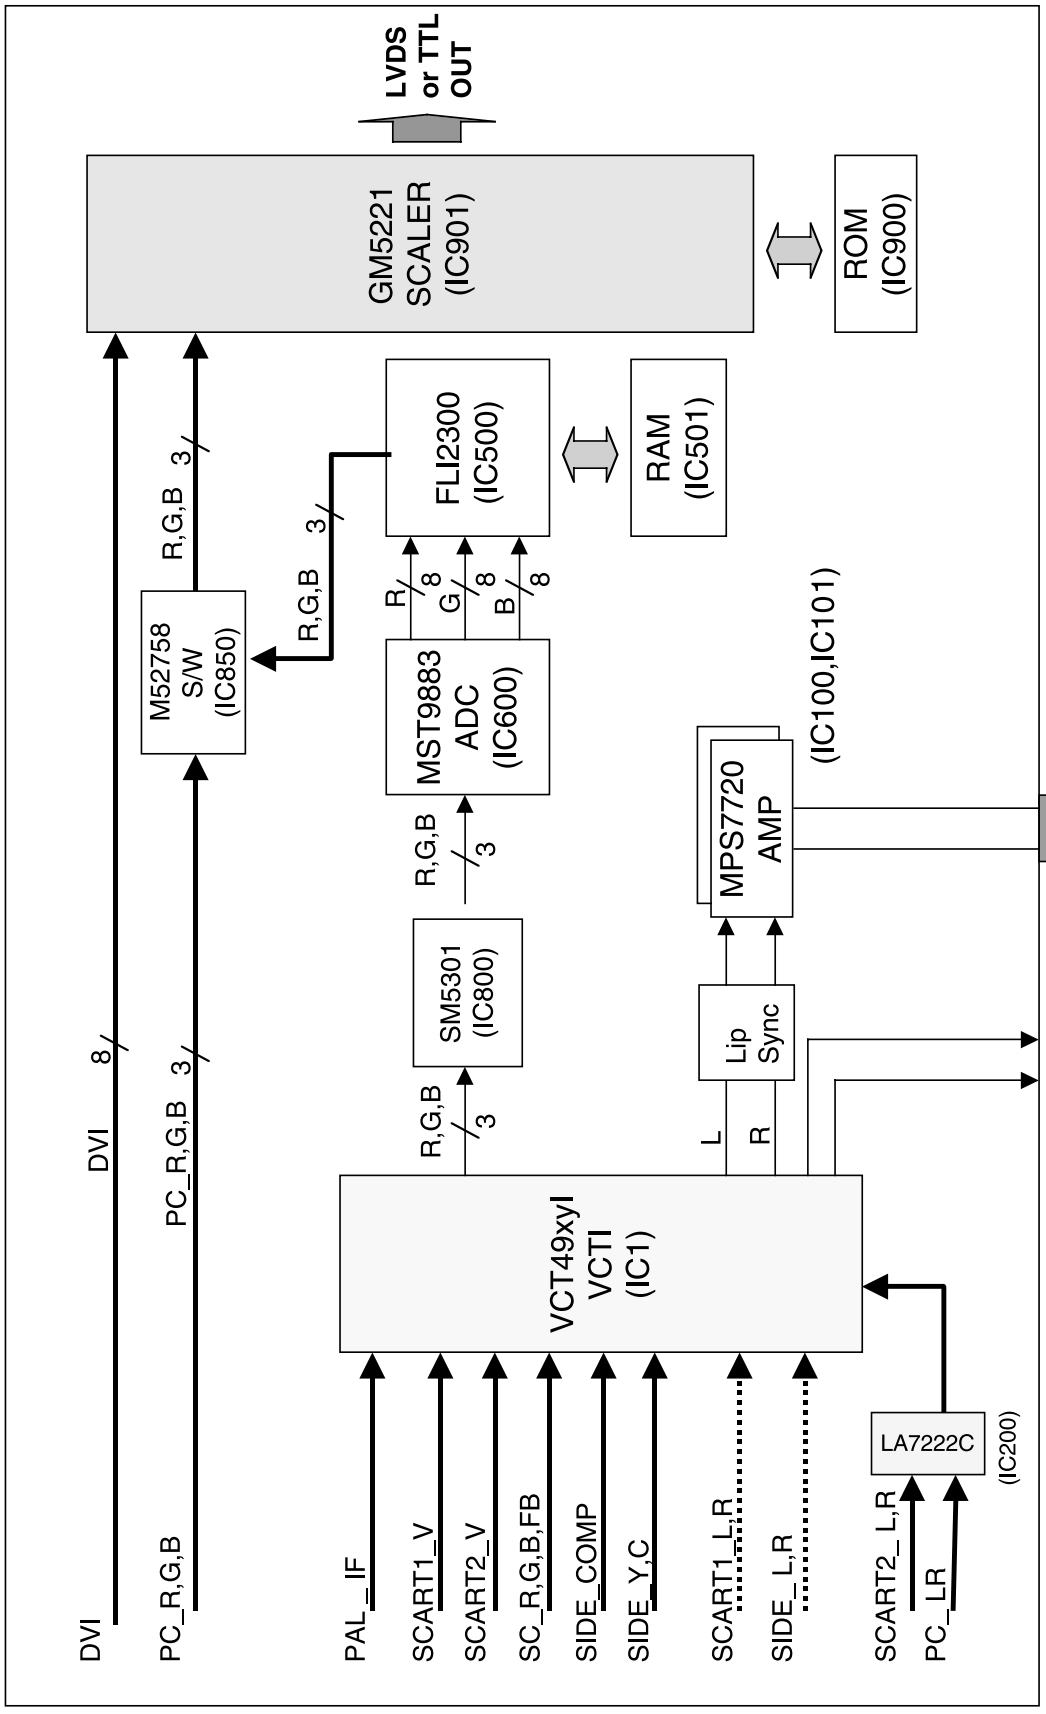

BLOCK DIAGRAM DESCRIPTION

1. Video control and display data

Video signal is received from TUNER, AV port(AV1,AV2,S-Video,Component) and goes to the one-chip video decoder (VCTI) which separate the R,G,B signal and passes on the signal to AD converter(AD9883) which converts 4:4:4 video format into digital and gives output to the Picture Enhancer(FLI2300).This picture enhancer improves the quality of the picture by changing the level of RGB signals.The output of this enhancer chip is fed to the deinterlacer ,which in turn goes to the Scalar (GM5221).The scalar gives the output on the LVDS cable which is connected to LCD module.

VCTi acts a micom and is responsible for video processing and audio signal processing.It accepts the RF signal and separates sound and picture from it.

Scaler is reponsible for regulating the timing of signal to LCD panel and size and location of the signal.Graphic control accepts the PC(Analog RGB) and DVI-D (Digital) signal, Scalar is reponsible for regulating the timing of signal to LCD panel and size and location of the signal.Graphic control accepts the PC(Analog RGB) and DVI-D (Digital) signal,the signal of PC input is connected to analog port in Scaler and the signal of DVI-D input is connected to digital port. Thus it receives two input and switch between them to give output at the LVDS which in turn gives output at the LCD module.

2. Power unit

The power board supplies a DC voltage of 33V, 24V, 12V to the main board.out of this 33v is used by the tuner and 24v is used directly by the inverter and the sound amplifier IC. 24v also is converted into 5v by a regulator. The 5v is changed into 3.3v and 1.8v by a regulator, both voltages(3.3v, 1.8v) is used by VCTI, Scaler, FLI2300 and AD9883. The voltage of LCD Panel is 12v.

WIRING DIAGRAM

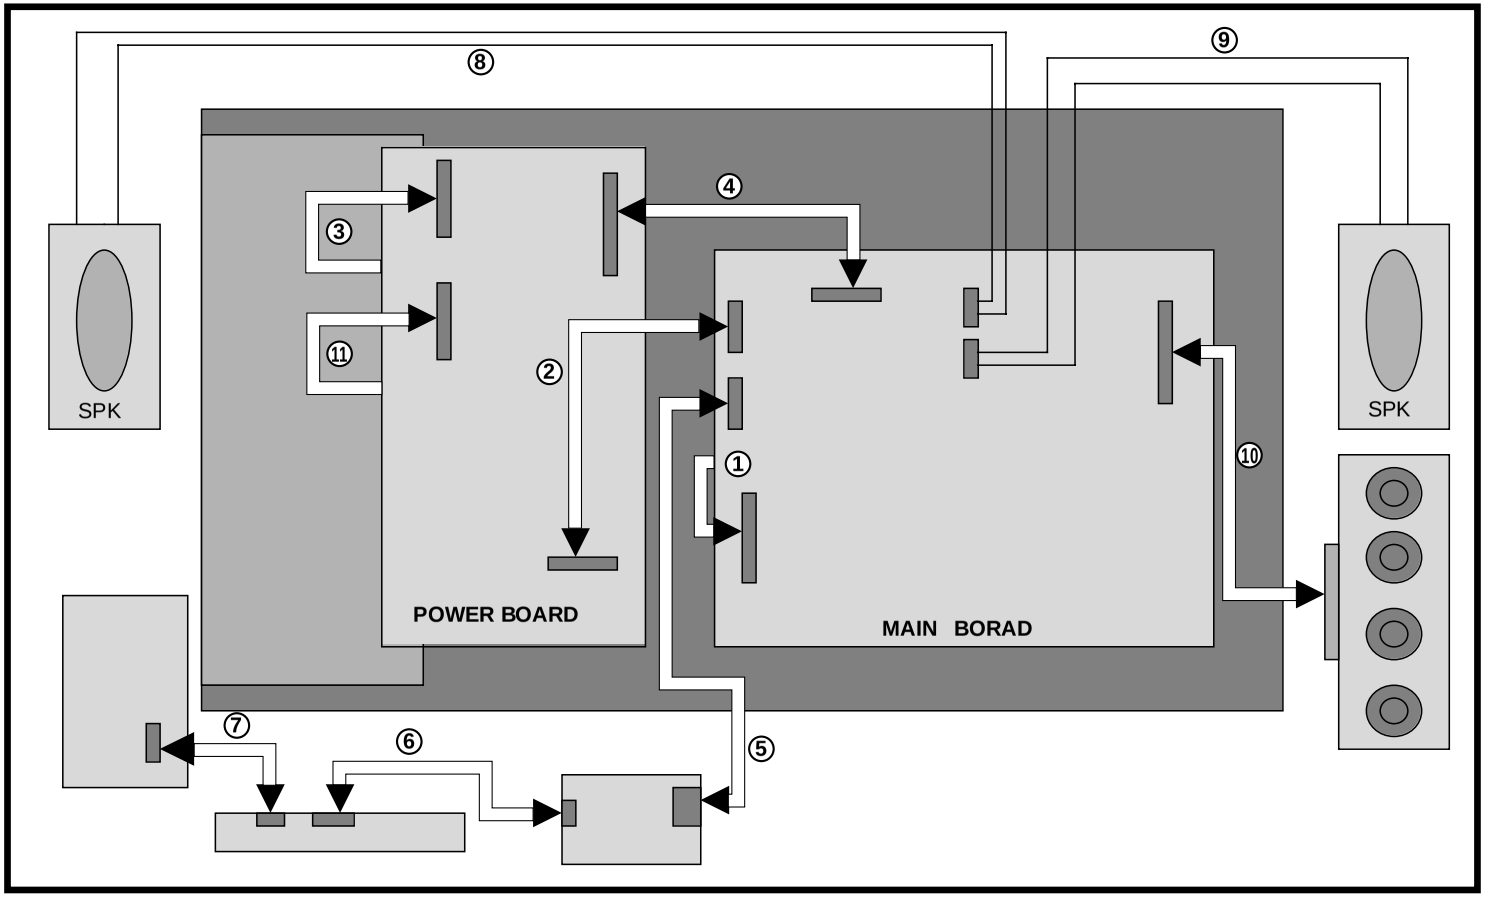

Wiring Part List

No.	Part No.
1	6631T11020A -**LPL**
	6631T11020B -**AUO**
2	6631T20033F
3	6631T20032A
4	6631T25019K
5	6631T20033B
6	6631T20033C
7	6631T20033D
8	6631T20029Z
9	6631T20029Y
10	6631T20033E

EXPLODED VIEW

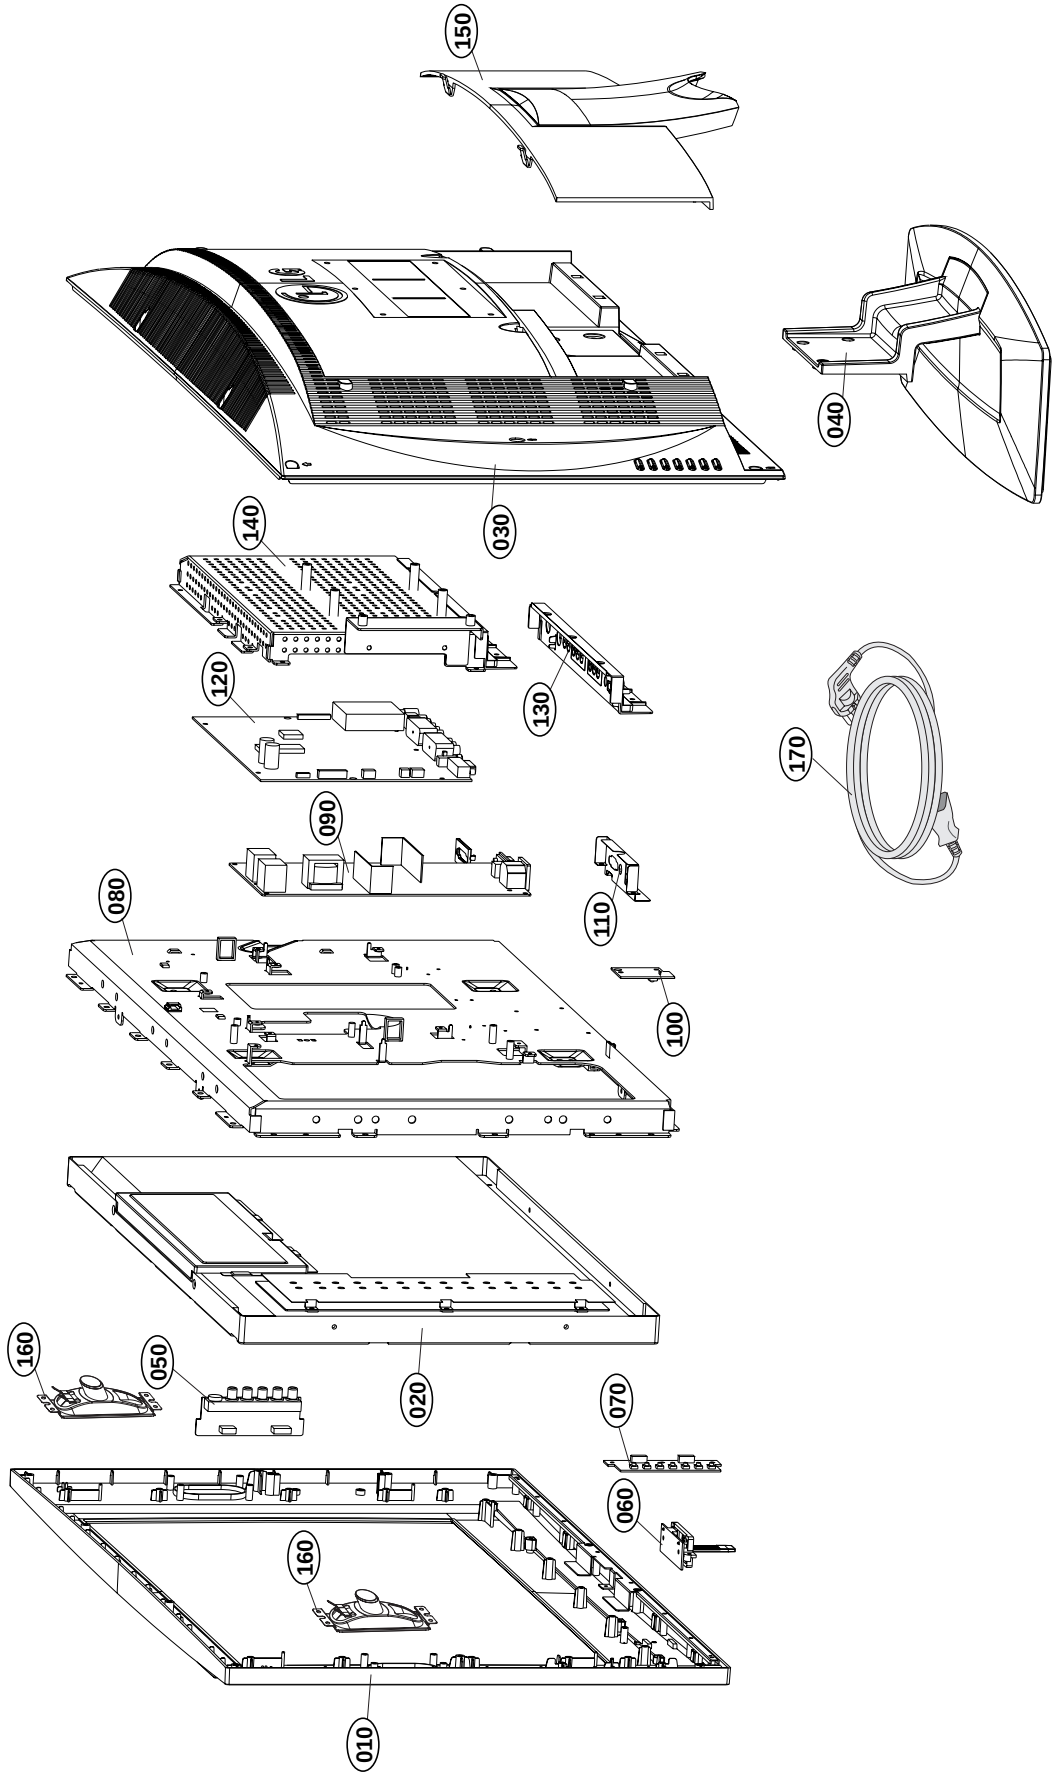

EXPLODED VIEW PARTS LIST

No.	PART NO.	DESCRIPTION
010	3091TKE013B	CABINET ASSEMBLY, RZ-26LZ50 BRAND 3090TKE006A 407AF LGEWA C/SKD
	3091TKE013S	CABINET ASSEMBLY, RT-26LZ50 BRAND 3090TKE006A LGENT LOCAL ASSY PHANTOM
020	6304FLP214A	LCD(LIQUID CRYSTAL DISPLAY), **LC260W01-A5KA LG PHILPS TFT COLOR** LEAD FREE
	or 6304FLP189A	LCD(LIQUID CRYSTAL DISPLAY), **LC260W01-A5K8 LG PHILPS TFT COLOR** SS D-IC
	6304FAU020A	LCD(LIQUID CRYSTAL DISPLAY), T260XW01-V8 **AU TFT COLOR** WXGA,MVA 600NITS 25MS 16 CCFL LVDS
030	3809TKE035H	BACK COVER ASSEMBLY, RZ-26LZ55 3808TKE005 **C/SKD**
	3809TKE035G	BACK COVER ASSEMBLY, RZ-26LZ55 3808TKE005 **NT PHANTOM**(1080I)
040	3043TKK171B	TILT SWIVEL ASSEMBLY, RZ-26LZ50 LGEWA **C/SKD**
	3043TKK171F	TILT SWIVEL ASSEMBLY, RZ-26LZ50 NONE **LGENT PHANTOM**
050	6871TVT370C	PWB(PCB) ASSEMBLY,VIDEO, RM-32/26/23LZ50 SIDE A/V SUB TOTAL BRAND LF
060	6871TST762C	PWB(PCB) ASSEMBLY,SUB, 26/27LZ50 LED & P/SW TOTAL BRAND -LF-
070	6871TST589D	PWB(PCB) ASSEMBLY, SUB, RZ-26LZ50 CONTROL TOTAL BRAND -LF-
080	4951TKS156H	METAL ASSEMBLY, FRAME RZ-26LZ50 **LPL** C/SKD
	4951TKS156D	METAL ASSEMBLY, FRAME **AUO** RZ-26LZ50 C/SKD
090	6871TPT294B	PWB(PCB) ASSEMBLY,POWER, RZ/T-32LZ50 POWER TOTAL BRAND POWER BOARD 26"-32" LPL (PB FREE)
	or 6871TPT275E	PWB(PCB) ASSEMBLY,POWER, RM-32LZ50 POWER TOTAL BRAND 26-32INCH PB FREE
100	6871TST588D	PWB(PCB) ASSEMBLY,SUB, RZ-26LZ50 IR SUB TOTAL BRAND -LF-
110	4814TKK280B	SHIELD, REAR POWER C/SKD
120	33139P2007A	MAIN TOTAL ASSEMBLY, RZ-26LZ55 **LPL** SKD BRAND ML-041A -LF
	33139P2008A	MAIN TOTAL ASSEMBLY , RZ-26LZ55 **AUO** SKD BRAND ML-041L -LF-
130	3551TKK516B	COVER ASSEMBLY, RZ-30LZ50 REAR NON AV C/SKD
140	4951TKK169J	METAL ASSEMBLY, REAR RZ-26LZ50 C/SKD
150	3550TKK516B	COVER, RZ-26LZ50 REAR C/SKD
160	6400GKTX01C	SPEAKER,FULLRANGE, F1527C-6428-4 K-TONE FULL-RANGE(GENERAL) 4 OHM 7/12W 85DB OTHERS 40*70MM TRACK TYPE
170	6410TEW010A	POWER CORD, LP34A+LS60 LONGWELL VDE/SEMKO 1870MM WALL CD/PB FREE BLACK
	6410TEW011A	POWER CORD, LP22+LS60 LONGWELL IMQ 1870MM WALL CD/PB FREE BLACK**- Only Italy**
	6410TPW003A	POWER CORD, LP-33+LS-60 LONGWELL PCT 1870MM WALL CD/PB FREE BLACK**-Only Russia**
	6410TBW004A	POWER CORD, LP-61+LS-60 LONGWELL BSI 1870MM WALL CD/PB FREE BLACK**-Only U.K**
	6410TEW001D	POWER CORD, SP027+IS14 I-SHENG SEV 1870MM WALL BLACK**-Only Swiss**
	6410TEW010A	POWER CORD, LP34A+LS60 LONGWELL VDE/SEMKO 1870MM WALL CD/PB FREE BLACK**-Only Czech**

REPLACEMENT PARTS LIST

For Capacitor & Resistors, the charactors at 2nd and 3rd digit in the P/No. means as follows;

CC, CX, CK, CN, CH : Ceramic
CQ : Polyestor
CE : Electrolytic
CF : Fixed Film

RD : Carbon Film
RS : Metal Oxide Film
RN : Metal Film
RH : CHIP, Metal Glazed(Chip)
RR : Drawing

DATE: 2005. 09.19.

*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
CAPACITOR				
		C108	0CE476EK638	47UF KMG 50V M FM5 TP 5
		C1102	0CE107CK638	"100UF SHL,SD 50V M FM5 TP 5"
		C404	0CE227EJ638	220UF KMG 35V M FM5 TP 5
		C129	181-007F	"MPE ECQ-V1H224JL3(TR), 50V"
		C130	181-007F	"MPE ECQ-V1H224JL3(TR), 50V"
		C1001	0CH3103K516	10000PF 50V 10% B(Y5P) 2012
		C1002	0CH3103K516	10000PF 50V 10% B(Y5P) 2012
		C1003	0CH3103K516	10000PF 50V 10% B(Y5P) 2012
		C1004	0CH3103K516	10000PF 50V 10% B(Y5P) 2012
		C1007	0CH3103K516	10000PF 50V 10% B(Y5P) 2012
		C1010	0CK273DK51A	27000PF 2012 50V 10% B(Y5P)
		C107	0CK225DFK4A	"2.2UF 2012 16V 20%,-20% F(Y"
		C109	0CH3103K516	10000PF 50V 10% B(Y5P) 2012
		C11	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C110	0CH3103K516	10000PF 50V 10% B(Y5P) 2012
		C113	0CK225DFK4A	"2.2UF 2012 16V 20%,-20% F(Y"
		C114	0CK225DFK4A	"2.2UF 2012 16V 20%,-20% F(Y"
		C12	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C127	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C128	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C1300	0CK105DK94A	"1UF 2012 50V 80%,-20% R/TP"
		C1302	0CH3103K516	10000PF 50V 10% B(Y5P) 2012
		C1305	0CK105DK94A	"1UF 2012 50V 80%,-20% R/TP"
		C1307	0CH3103K516	10000PF 50V 10% B(Y5P) 2012
		C135	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C136	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C15	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C16	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C18	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C19	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C23	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C3	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C306	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C318	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C4	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C4004	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C4005	0CH3222K516	2200PF 2012 50V 10% B(Y5P)
		C4006	0CH3222K516	2200PF 2012 50V 10% B(Y5P)
		C4009	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C4010	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C4011	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C4016	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C4017	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C4019	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C4021	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C42	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C44	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C45	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C49	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C500	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C505	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C506	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C507	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C508	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C509	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP

DATE: 2005. 09.19.

*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C51	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C510	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C511	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C512	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C513	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C514	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C517	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C518	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C519	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C521	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C522	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C523	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C526	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C527	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C528	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C529	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C530	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C531	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C532	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C533	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C534	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C535	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C536	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C537	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C538	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C539	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C540	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C541	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C542	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C544	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C545	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C546	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C547	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C549	0CK105DK94A	"1UF 2012 50V 80%,-20% R/TP"
		C550	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C551	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C552	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C553	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C554	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C555	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C556	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C557	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C558	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C559	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C567	0CK105DK94A	"1UF 2012 50V 80%,-20% R/TP"
		C6	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C60	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C606	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C608	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C609	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C61	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C614	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C615	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C616	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP

DATE: 2005. 09.19.

*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C618	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C619	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C620	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C621	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C622	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C623	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C624	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C625	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C627	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C628	0CH3822K516	8200PF 2012 50V 10% B(Y5P)
		C629	0CH3823K516	82000PF 2012 50V 10% B(Y5P)
		C632	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C633	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C634	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C635	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C636	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C637	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C638	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C639	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C64	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C640	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C65	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C66	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C67	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C700	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C704	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C705	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C75	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C751	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C76	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C760	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C761	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C77	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C79	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C80	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C804	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C808	0CK105DK94A	"1UF 2012 50V 80%,-20% R/TP"
		C809	0CK105DK94A	"1UF 2012 50V 80%,-20% R/TP"
		C81	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C810	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C811	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C812	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C813	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C82	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C84	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C850	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C851	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C852	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C853	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C854	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C855	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C856	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C864	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C865	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C866	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C867	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C868	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C869	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C870	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C90	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C908	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C909	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP

DATE: 2005. 09.19.

*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C910	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C911	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C912	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C913	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C914	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C915	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C916	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C917	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C918	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C919	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C92	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C920	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C921	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C922	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C923	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C926	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C927	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C928	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C929	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C930	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C931	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C935	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C936	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C938	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C939	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C940	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C941	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C942	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C943	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C944	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C945	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C946	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C947	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C948	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C949	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C950	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C951	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C952	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C958	0CK225DFK4A	"2.2UF 2012 16V 20%,-20% F(Y"
		C96	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C960	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP-**LPL**
		C963	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C964	0CK105DK94A	"1UF 2012 50V 80%,-20% R/TP-**AUO**
		C966	0CH3103K516	10000PF 50V 10% B(Y5P) 2012-**AUO**
		C967	0CH3103K516	10000PF 50V 10% B(Y5P) 2012-**AUO**
		C968	0CH6101K416	100PF 50V 5% NP0 2012 R/TP-**AUO**
		C969	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C970	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C971	0CE107EF638	100UF KMG 16V M FM5 TP 5-**AUO**
		C973	0CH3104K566	0.1UF 50V 10% X7R 2012 R/TP
		C10	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C115	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C116	0CK562CK51A	5600PF 1608 50V 10% R/TP B(
		C117	0CK562CK51A	5600PF 1608 50V 10% R/TP B(
		C118	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C125	0CK105EK56A	1UF 3216 50V 10% X7R R/TP
		C126	0CK105EK56A	1UF 3216 50V 10% X7R R/TP
		C1301	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(
		C1306	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(
		C25	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C26	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C27	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R

DATE: 2005. 09.19.

*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C28	0CK334CF94A	"0.33UF 1608 16V 80%,-20% F("
		C29	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C30	0CK334CF94A	"0.33UF 1608 16V 80%,-20% F("
		C32	0CK334CF94A	"0.33UF 1608 16V 80%,-20% F("
		C33	0CK334CF94A	"0.33UF 1608 16V 80%,-20% F("
		C34	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C35	0CK334CF94A	"0.33UF 1608 16V 80%,-20% F("
		C37	0CK334CF94A	"0.33UF 1608 16V 80%,-20% F("
		C40	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C4000	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C4014	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C4018	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C4020	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C41	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C5001	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C504	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C524	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C611	0CK473CK56A	47000PF 1608 50V 10% R/TP X
		C612	0CK473CK56A	47000PF 1608 50V 10% R/TP X
		C613	0CK473CK56A	47000PF 1608 50V 10% R/TP X
		C626	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C7	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C70	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C71	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C72	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C73	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C750	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C752	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C753	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C759	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C78	0CK106EF56A	10UF 3216 16V 10% X7R R/TP
		C8	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C800	0CK105CF94A	"1UF 1608 16V 80%,-20% R/TP"
		C801	0CK105CF94A	"1UF 1608 16V 80%,-20% R/TP"
		C802	0CK105CF94A	"1UF 1608 16V 80%,-20% R/TP"
		C803	0CK105CF94A	"1UF 1608 16V 80%,-20% R/TP"
		C9	0CK104CK56A	0.1UF 1608 50V 10% R/TP X7R
		C901	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(
		C902	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(
		C903	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(
		C904	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(
		C905	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(
		C906	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(
		C907	0CK103CK51A	0.01UF 1608 50V 10% R/TP B(
		C13	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C1303	0CH6101K416	100PF 50V 5% NP0 2012 R/TP
		C1308	0CH6101K416	100PF 50V 5% NP0 2012 R/TP
		C14	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C2	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C20	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C200	0CH6221K416	220PF 2012 50V 5% NP0 -
		C237	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C238	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C319	0CH6120K416	12PF 2012 50V 5% NP0 -
		C324	0CH6120K416	12PF 2012 50V 5% NP0 -
		C328	0CH6120K416	12PF 2012 50V 5% NP0 -
		C329	0CH6120K416	12PF 2012 50V 5% NP0 -
		C331	0CH6150K416	15PF 2012 50V 5% NP0 R/TP
		C336	0CH6150K416	15PF 2012 50V 5% NP0 R/TP
		C340	0CH6150K416	15PF 2012 50V 5% NP0 R/TP
		C341	0CH6150K416	15PF 2012 50V 5% NP0 R/TP
		C352	0CC270DK41A	27PF 2012 50V 5% NP0 R/TP

DATE: 2005. 09.19.

*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C354	0CH6471K416	470PF 2012 50V 5% NP0 R/TP
		C355	0CH6471K416	470PF 2012 50V 5% NP0 R/TP
		C43	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C46	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C50	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C53	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C59	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C701	0CH6120K416	12PF 2012 50V 5% NP0 -
		C702	0CH6120K416	12PF 2012 50V 5% NP0 -
		C74	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C755	0CH6471K416	470PF 2012 50V 5% NP0 R/TP
		C756	0CH6471K416	470PF 2012 50V 5% NP0 R/TP
		C757	0CH6471K416	470PF 2012 50V 5% NP0 R/TP
		C758	0CH6101K416	100PF 50V 5% NP0 2012 R/TP
		C83	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C86	0CH6102K406	1000PF 50V 5% SL 2012 R/TP
		C924	0CH6080K116	8PF 2012 50V 0.5 PF C0G R/T
		C925	0CH6080K116	8PF 2012 50V 0.5 PF C0G R/T
		C1015	0CC680CK41A	68PF 1608 50V 5% R/TP NP0
		C1016	0CC680CK41A	68PF 1608 50V 5% R/TP NP0
		C121	0CC100CK41A	10PF 1608 50V 5% R/TP NP0
		C122	0CC100CK41A	10PF 1608 50V 5% R/TP NP0
		C1500	0CC330CK41A	33PF 1608 50V 5% R/TP NP0
		C1501	0CC330CK41A	33PF 1608 50V 5% R/TP NP0
		C1502	0CC330CK41A	33PF 1608 50V 5% R/TP NP0
		C202	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C203	0CC221CK41A	220PF 1608 50V 5% R/TP NP0
		C204	0CC471CK41A	470PF 1608 50V 5% R/TP NP0
		C205	0CC471CK41A	470PF 1608 50V 5% R/TP NP0
		C207	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C209	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C21	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C210	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C211	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C214	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C217	0CC471CK41A	470PF 1608 50V 5% R/TP NP0
		C218	0CC471CK41A	470PF 1608 50V 5% R/TP NP0
		C22	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C220	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C222	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C223	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C224	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C24	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C343	0CC270CK41A	27PF 1608 50V 5% R/TP NP0
		C348	0CC270CK41A	27PF 1608 50V 5% R/TP NP0
		C353	0CC270CK41A	27PF 1608 50V 5% R/TP NP0
		C4003	0CC150CK41A	15PF 1608 50V 5% R/TP NP0
		C4007	0CC150CK41A	15PF 1608 50V 5% R/TP NP0
		C47	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C48	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C501	0CC101CK41A	100PF 1608 50V 5% R/TP NP0
		C515	0CC330CK41A	33PF 1608 50V 5% R/TP NP0
		C516	0CC330CK41A	33PF 1608 50V 5% R/TP NP0
		C600	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C601	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C602	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C603	0CC220CK41A	22PF 1608 50V 5% R/TP NP0
		C610	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C754	0CC471CK41A	470PF 1608 50V 5% R/TP NP0
		C85	0CC102CK41A	1000PF 1608 50V 5% R/TP NP0
		C1006	0CE106EK638	10UF KMG 50V 20% FM5 TP 5
		C1100	0CE106BF618	10UF KME TYPE 16V 20% FL TP

DATE: 2005. 09.19.

*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C111	0CE475EK638	4.7UF KMG 50V 20% FM5 TP 5
		C1112	0CE108EF618	1000UF KMG 16V 20% FL TP 5
		C1113	0CE108EF618	1000UF KMG 16V 20% FL TP 5
		C1114	0CE108EF618	1000UF KMG 16V 20% FL TP 5
		C1115	0CE108EF618	1000UF KMG 16V 20% FL TP 5
		C112	0CE475EK638	4.7UF KMG 50V 20% FM5 TP 5
		C119	0CE106BF618	10UF KME TYPE 16V 20% FL TP
		C120	0CE106BF618	10UF KME TYPE 16V 20% FL TP
		C1202	0CE477EJ618	470UF KMG 35V 20% FL TP 5
		C123	0CE477EJ618	470UF KMG 35V 20% FL TP 5
		C124	0CE477EJ618	470UF KMG 35V 20% FL TP 5
		C1299	0CE477EJ618	470UF KMG 35V 20% FL TP 5
		C1304	0CE477EJ618	470UF KMG 35V 20% FL TP 5
		C131	0CE477EJ618	470UF KMG 35V 20% FL TP 5
		C132	0CE477EJ618	470UF KMG 35V 20% FL TP 5
		C133	0CE477EJ618	470UF KMG 35V 20% FL TP 5
		C134	0CE477EJ618	470UF KMG 35V 20% FL TP 5
		C100	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C1008	0CE227WF6DC	220UF MVK 16V 20% R/TP(SMD)
		C1503	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C1504	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C17	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C206	0CH8226F691	22UF 16V 20% 105STD (CYL) R
		C208	0CH8226F691	22UF 16V 20% 105STD (CYL) R
		C219	0CH8226F691	22UF 16V 20% 105STD (CYL) R
		C221	0CH8226F691	22UF 16V 20% 105STD (CYL) R
		C225	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C226	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C227	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C228	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C235	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C236	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C300	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C301	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C302	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C303	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C304	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C307	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C308	0CH8476H691	47UF 25V 20% 105STD (CYL) R
		C309	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C312	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C313	0CH8476H691	47UF 25V 20% 105STD (CYL) R
		C314	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C315	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C316	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C317	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C4001	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C4002	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C4008	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C4012	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C4013	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C4015	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C4022	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C4023	0CH8106J691	10UF 35V 20% 105STD (CYL) R
		C4024	0CE477WF6DC	470UF MVK 16V 20% SMD R/TP(
		C5	0CE475WJ6DC	4.7UF MVK 35V 20% R/TP(SMD)
		C502	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C503	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C52	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C520	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C525	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C54	0CH8476F691	47UF 16V 20% 105STD (CYL) R

DATE: 2005. 09.19.

*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		C543	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C55	0CH8476H691	47UF 25V 20% 105STD (CYL) R
		C560	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C566	0CH8106F691	10UF 16V 20% 105STD (CYL) R
		C604	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C605	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C607	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C62	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C63	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C703	0CE107WF6DC	100UF MVK 16V 20% R/TP(SMD)
		C805	0CE227WF6DC	220UF MVK 16V 20% R/TP(SMD)
		C806	0CE227WF6DC	220UF MVK 16V 20% R/TP(SMD)
		C807	0CE227WF6DC	220UF MVK 16V 20% R/TP(SMD)
		C814	0CE227WF6DC	220UF MVK 16V 20% R/TP(SMD)
		C815	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C857	0CE477WF6DC	470UF MVK 16V 20% SMD R/TP(
		C858	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C859	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C860	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C861	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C862	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C863	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C87	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C88	0CH8476H691	47UF 25V 20% 105STD (CYL) R
		C89	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C900	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C91	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C953	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C956	0CH8476H691	47UF 25V 20% 105STD (CYL) R**-LPL**
		C957	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C959	0CH8476F691	47UF 16V 20% 105STD (CYL) R
		C97	0CH8476H691	47UF 25V 20% 105STD (CYL) R
		C972	0CH8476H691	47UF 25V 20% 105STD (CYL) R
		DIODEs		
		D100	0DRFC00288A	SS14 FAIR CHILD R/TP SMA 20
		D101	0DRFC00288A	SS14 FAIR CHILD R/TP SMA 20
		ZD1300	0DR340009AA	MBRS340 TP FAIRCHILD NON 40
		ZD1301	0DR340009AA	MBRS340 TP FAIRCHILD NON 40
		IC751	0DRSE00018B	"SRV05-4.TCT, SEMTECH R/TP S"
		IC754	0DRSE00018B	"SRV05-4.TCT, SEMTECH R/TP S"
		D107	0DS226009AA	KDS226 TP KEC - 80V - - 4NS
		D711	0DD184009AA	KDS184 TP KEC - 85V - - - 3
		D102	0DS181009AA	KDS181 TP KEC SOT-23 80V
		D103	0DS181009AA	KDS181 TP KEC SOT-23 80V
		D104	0DZ620009HB	UDZ S 6.2B TP ROHM SOD323 2
		D105	0DZ620009HB	UDZ S 6.2B TP ROHM SOD323 2
		D703	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		D704	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD101	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD215	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD216	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD217	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD218	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD219	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD220	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD222	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		D700	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		D701	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		D702	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		D705	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323

DATE: 2005. 09.19.

*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		D706	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD203	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD204	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD205	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD206	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD207	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD208	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD210	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD213	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD214	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD221	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD5001	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD5002	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD5003	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD851	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD852	0DZ510009EE	UDZ S 5.1B TP ROHM-K SOD323
		ZD901	0DR340009AA	MBRS340 TP FAIRCHILD NON 40-**AUO**
		ZD1000	0DZ330009DF	MTZJ33B TP ROHM-K DO34 0.5W
		ZD10	0DZ910009FE	UDZS 9.1B TP ROHM - - 9.1V
	IC			
		IC501	0IMMREB010A	"M12L64322A-6T ESMT 86P,TSOP"
		IC749	0IMMRSG036A	"M24C02-WMN6T(P),LF SGS-THOM"
		IC753	0IMMRSG036A	"M24C02-WMN6T(P),LF SGS-THOM"
		IC907	0IMCRAL006A	"AT24C16AN-10SU-2.7,LF ATMEL"
		IC918	0IMCRAL006A	"AT24C16AN-10SU-2.7,LF ATMEL"
		IC100	0IMCRMZ002A	MP7720 MONOLITHIC POWER SYS
		IC101	0IMCRMZ002A	MP7720 MONOLITHIC POWER SYS
		IC500	0IMCRGN002D	"FLI2300BD-LF,PB FREE GENESI"
		IC750	0IMCRSG010A	ST3232CDR SGS-THOMSON SOP16
		IC850	0IMCRMI006B	"M52758FP,LF RENESAS 36P,SSO"
		IC1	0IPRPMN003G	"VCT49X3F-F2,LF MICRONAS 144"
		IC4002	0IPRPAK013A	"AK4525VF-E2,LF AKM 28P,VOSP"
		IC4005	0IPRPJR017A	"NJU26901E2 JRC 8P,EMP R/TP"
		IC600	0IPRPM3002D	"MST9883C-LF-110 MSTAR 80P,L"
		IC800	0IPRPNP001A	"SM5301BS(ATSC DTV) NPC 28P,"
		IC901	0IPRPGN014C	"GM5221H-BC-LF,PB FREE GENES"
		IC904	0IPMG00063A	MP1593DN-LF-Z MONOLITHIC PO-**AUO**
		IC1300	0IPMG00063A	MP1593DN-LF-Z MONOLITHIC PO
		IC1301	0IPMG00063A	MP1593DN-LF-Z MONOLITHIC PO
		IC2	0IPMGK2001B	AIC1117A-33PYTR(BS33) AIC 3
		IC3	0IKE702700D	"KIA7027AF 3, SOT-89 TP RESE"
		IC300	0IPMGKE039A	"KIA78D09F KEC 3P,DPAK R/TP"
		IC4	0IPMGK2001B	AIC1117A-33PYTR(BS33) AIC 3
		IC4007	0IPMG00107A	AZ1117H-2.5TR/E1 AAC 3PIN S
		IC505	0IPMGSG020A	"LD1117DT18TR,LF SGS-THOMSON"
		IC6	0IPMGSG018D	LD1086DT18TR-LF SGS-THOMSON
		IC601	0IPMGK2001B	AIC1117A-33PYTR(BS33) AIC 3
		IC604	0IPMGFA061A	"FAN1587AD33X FAIRCHILD 3P,D"
		IC8	0IMCRFA015A	KA7805R FAIRCHILD 2P D-PAK
		IC905	0IPMGFA061A	"FAN1587AD33X FAIRCHILD 3P,D"
		IC906	0IPMGSG018D	LD1086DT18TR-LF SGS-THOMSON
		IC103	0ISS780800J	"KA78M08R 3P,D-PAK TP VOL. R"
		IC200	0ISA722200A	LA7222 (1280 AUDIO) - - - -
		IC2000	0ISTL00026A	"MC14066BDR2G,LF ON SEMI 14P"
		IC4000	0ISTLFA108A	"NC7SV125P5X FAIRCHILD 5P,SC"
		IC4003	0ISTLFA108A	"NC7SV125P5X FAIRCHILD 5P,SC"
		IC4004	0ISTLFA108A	"NC7SV125P5X FAIRCHILD 5P,SC"
		IC4006	0ISTL00021A	"SN74AHCT1G125DCKR,LF TEXAS"
		IC702	0ISTL00031A	"MC74HC4066ADR2G,LF ON SEMI"
		IC752	0IMCRTI001A	"SN74HCT157DR,LF TEXAS INST"

DATE: 2005. 09.19.

*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
	COIL & CORE & INDUCTOR			
		L104	6140TBZ045A	"38.5UH(DIP), 6A, P7.5, DR8."
		L105	6140TBZ045A	"38.5UH(DIP), 6A, P7.5, DR8."
		L1300	6140VR0008B	SLF12575T-150M3R2 15UH SMD
		L1301	6140VR0008B	SLF12575T-150M3R2 15UH SMD
		L100	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L1002	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L3	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L301	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L302	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L304	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L311	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L4	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L401	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L5	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L500	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L501	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L502	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L503	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L504	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L505	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L600	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L601	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L602	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L701	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L800	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L850	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L900	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L901	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L902	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L903	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L904	6210TCE001G	HH-1M3216-501 CERATEC 3216M-**AUO**
		L906	6140VR0008B	SLF12575T-150M3R2 15UH SMD-**AUO**
		L907	6210TCE001G	HH-1M3216-501 CERATEC 3216M-**LPL**
		L202	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L203	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L204	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L205	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L207	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L208	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L209	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L210	6210TCE001A	HB-1S2012-080JT CERATEC 201
		L4001	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L4003	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L5000	6210TCE001G	HH-1M3216-501 CERATEC 3216M
		L603	6210TCE001A	HB-1S2012-080JT CERATEC 201
		Z1000	6200QL3002F	"X6966M EPCOS ST SIP5K, 6200"
		L1	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L1001	0LC1020101A	1UH 10% 2012 R/TC FI-B2012-
		L11	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L13	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L14	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L15	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L17	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L2	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L402	0LC1532101A	15UH 10% 3216 R/TC FI-C3216
		L403	0LC1532101A	15UH 10% 3216 R/TC FI-C3216
		L7	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L10	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L12	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L16	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L200	0LC1020101A	1UH 10% 2012 R/TC FI-B2012-

DATE: 2005. 09.19.

*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		L201	0LC1020101A	1UH 10% 2012 R/TC FI-B2012-
		L306	0LC1532101A	15UH 10% 3216 R/TC FI-C3216
		L307	0LC1532101A	15UH 10% 3216 R/TC FI-C3216
		L8	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
		L9	0LC1032101A	10UH 10% 3216 R/TC FI-C3216
FET & TRANSISTOR				
		Q1000	0TR388109AA	KTC3881 CHIP TP KEC - -
		Q1101	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q1102	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q212	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q300	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q302	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q303	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q304	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q318	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q701	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q100	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q101	0TR150400BA	CHIP 2SA1504S(ASY) BK KEC -
		Q12	0TR150400BA	CHIP 2SA1504S(ASY) BK KEC -
		Q13	0TR150400BA	CHIP 2SA1504S(ASY) BK KEC -
		Q14	0TR150400BA	CHIP 2SA1504S(ASY) BK KEC -
		Q15	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q16	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q17	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q301	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q305	0TR150400BA	CHIP 2SA1504S(ASY) BK KEC -
		Q306	0TR150400BA	CHIP 2SA1504S(ASY) BK KEC -
		Q308	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q310	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q313	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q315	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q316	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q317	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q500	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC -
		Q901	0TR387500AA	CHIP 2SC3875S(ALY) BK KEC **-LPL**
		IC1101	0TF492509AA	SI4925DY TP TEMIC 30V 6.1A
		IC902	0TF492509AA	SI4925DY TP TEMIC 30V 6.1A**-LPL**
RESISTORs				
		RA600	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100
		RA601	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100
		RA602	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100
		RA603	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100
		RA604	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100
		RA605	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100
		C333	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		C338	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		C339	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R10	0RH3301D622	3.3K OHM 1 / 10 W 2012 5.00
		R1001	0RH0562D622	56 OHM 1 / 10 W 2012 5.00%
		R1002	0RH1501D622	1.5K OHM 1 / 10 W 2012 5.00
		R1003	0RH8200D622	820 OHM 1 / 10 W 2012 5.00%
		R1004	0RH3000D622	300 OHM 1 / 10 W 2012 5.00%
		R1005	0RH0682D622	68 OHM 1 / 10 W 2012 5.00%
		R1010	0RH7501D622	7.5K OHM 1 / 10 W 2012 5.00
		R1011	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R1012	0RH7502D622	75K OHM 1 / 10 W 2012 5.00%
		R1014	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R1026	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D

DATE: 2005. 09.19.

*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R104	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R106	0RH1001D622	1K OHM 1 / 10 W 2012 5.00%
		R107	0RH1503D622	150K OHM 1 / 10 W 2012 5.00
		R11	0RH3301D622	3.3K OHM 1 / 10 W 2012 5.00
		R1100	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R1101	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R1102	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R1105	0RH1001D622	1K OHM 1 / 10 W 2012 5.00%
		R1106	0RH1202D622	12K OHM 1 / 10 W 2012 5.00%
		R1107	0RH1502D622	15K OHM 1 / 10 W 2012 5.00%
		R1108	0RH1001D622	1K OHM 1 / 10 W 2012 5.00%
		R118	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R126	0RH1502D622	15K OHM 1 / 10 W 2012 5.00%
		R1290	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R1301	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R1304	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R132	0RH1003D622	100K OHM 1 / 10 W 2012 5.00
		R133	0RH1003D622	100K OHM 1 / 10 W 2012 5.00
		R134	0RH1003D622	100K OHM 1 / 10 W 2012 5.00
		R135	0RH1003D622	100K OHM 1 / 10 W 2012 5.00
		R1350	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R140	0RH0392D622	39 OHM 1 / 10 W 2012 5.00%
		R141	0RH0392D622	39 OHM 1 / 10 W 2012 5.00%
		R142	0RH0392D622	39 OHM 1 / 10 W 2012 5.00%
		R143	0RH0392D622	39 OHM 1 / 10 W 2012 5.00%
		R144	0RH0392D622	39 OHM 1 / 10 W 2012 5.00%
		R145	0RH0392D622	39 OHM 1 / 10 W 2012 5.00%
		R146	0RH0392D622	39 OHM 1 / 10 W 2012 5.00%
		R147	0RH0392D622	39 OHM 1 / 10 W 2012 5.00%
		R1501	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R154	0RH0822D622	82 OHM 1 / 10 W 2012 5.00%
		R156	0RH0822D622	82 OHM 1 / 10 W 2012 5.00%
		R158	0RH0822D622	82 OHM 1 / 10 W 2012 5.00%
		R162	0RH2701D622	2.7K OHM 1 / 10 W 2012 5.00
		R201	0RH4703D622	470K OHM 1 / 10 W 2012 5.00
		R202	0RH5601D622	5.6K OHM 1 / 10 W 2012 5.00
		R203	0RH5601D622	5.6K OHM 1 / 10 W 2012 5.00
		R204	0RH4703D622	470K OHM 1 / 10 W 2012 5.00
		R22	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R24	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R25	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R264	0RH1001D622	1K OHM 1 / 10 W 2012 5.00%
		R265	0RH1001D622	1K OHM 1 / 10 W 2012 5.00%
		R266	0RH4701D622	4.7K OHM 1 / 10 W 2012 5.00
		R267	0RH4702D622	47K OHM 1 / 10 W 2012 5.00%
		R268	0RH4701D622	4.7K OHM 1 / 10 W 2012 5.00
		R300	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R301	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R302	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R304	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R305	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R306	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R307	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R308	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R309	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R312	0RH4700D622	470 OHM 1 / 10 W 2012 5.00%
		R313	0RH1500D622	150 OHM 1 / 10 W 2012 5.00%
		R314	0RH4700D622	470 OHM 1 / 10 W 2012 5.00%
		R315	0RH1500D622	150 OHM 1 / 10 W 2012 5.00%
		R320	0RH4703D622	470K OHM 1 / 10 W 2012 5.00
		R322	0RH1500D622	150 OHM 1 / 10 W 2012 5.00%
		R324	0RH4703D622	470K OHM 1 / 10 W 2012 5.00

DATE: 2005. 09.19.

*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R338	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R339	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R342	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R343	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R348	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R349	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R352	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R353	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R354	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R355	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R363	0RH1001D622	1K OHM 1 / 10 W 2012 5.00%
		R367	0RH1001D622	1K OHM 1 / 10 W 2012 5.00%
		R373	0RH1001D622	1K OHM 1 / 10 W 2012 5.00%
		R377	0RH1001D622	1K OHM 1 / 10 W 2012 5.00%
		R379	0RH1001D622	1K OHM 1 / 10 W 2012 5.00%
		R381	0RH1001D622	1K OHM 1 / 10 W 2012 5.00%
		R383	0RH1001D622	1K OHM 1 / 10 W 2012 5.00%
		R394	0RH6800D622	680 OHM 1 / 10 W 5% D R/TP
		R395	0RH6800D622	680 OHM 1 / 10 W 5% D R/TP
		R4000	0RH1003D622	100K OHM 1 / 10 W 2012 5.00
		R4001	0RH1003D622	100K OHM 1 / 10 W 2012 5.00
		R4002	0RH4700D622	470 OHM 1 / 10 W 2012 5.00%
		R4003	0RH4700D622	470 OHM 1 / 10 W 2012 5.00%
		R4004	0RH0472D622	47 OHM 1 / 10 W 2012 5.00%
		R4008	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R4010	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R4012	0RH4700D622	470 OHM 1 / 10 W 2012 5.00%
		R4025	0RH0472D622	47 OHM 1 / 10 W 2012 5.00%
		R4026	0RH4700D622	470 OHM 1 / 10 W 2012 5.00%
		R44	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R45	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R46	0RH1001D622	1K OHM 1 / 10 W 2012 5.00%
		R5006	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R5008	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R5014	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R502	0RH3301D622	3.3K OHM 1 / 10 W 2012 5.00
		R505	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R506	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R516	0RH0222D622	22 OHM 1 / 10 W 2012 5.00%
		R517	0RH0222D622	22 OHM 1 / 10 W 2012 5.00%
		R519	0RH0222D622	22 OHM 1 / 10 W 2012 5.00%
		R520	0RH1800D622	180 OHM 1 / 10 W 2012 5.00%
		R527	0RH4701D622	4.7K OHM 1 / 10 W 2012 5.00
		R530	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R532	0RH0222D622	22 OHM 1 / 10 W 2012 5.00%
		R607	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R610	0RH2701D622	2.7K OHM 1 / 10 W 2012 5.00
		R700	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R703	0RH4701D622	4.7K OHM 1 / 10 W 2012 5.00
		R705	0RH4701D622	4.7K OHM 1 / 10 W 2012 5.00
		R712	0RH0752D622	75 OHM 1 / 10 W 2012 5.00%
		R713	0RH0752D622	75 OHM 1 / 10 W 2012 5.00%
		R715	0RH1202D622	12K OHM 1 / 10 W 2012 5.00%
		R716	0RH0752D622	75 OHM 1 / 10 W 2012 5.00%
		R719	0RH1502D622	15K OHM 1 / 10 W 2012 5.00%
		R725	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R726	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R729	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R730	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R732	0RH1001D622	1K OHM 1 / 10 W 2012 5.00%
		R737	0RH4701D622	4.7K OHM 1 / 10 W 2012 5.00
		R738	0RH4701D622	4.7K OHM 1 / 10 W 2012 5.00

DATE: 2005. 09.19.

*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R752	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R753	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R755	0RH0102D622	10 OHM 1 / 10 W 2012 5.00%
		R756	0RH0102D622	10 OHM 1 / 10 W 2012 5.00%
		R760	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R761	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R802	0RH8200D622	820 OHM 1 / 10 W 2012 5.00%
		R803	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R805	0RH0752D622	75 OHM 1 / 10 W 2012 5.00%
		R806	0RH4700D622	470 OHM 1 / 10 W 2012 5.00%
		R809	0RH0102D622	10 OHM 1 / 10 W 2012 5.00%
		R83	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R85	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R850	0RH4701D622	4.7K OHM 1 / 10 W 2012 5.00
		R851	0RH4701D622	4.7K OHM 1 / 10 W 2012 5.00
		R854	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R87	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R89	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R903	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D-**LPL**
		R930	0RH3301D622	3.3K OHM 1 / 10 W 2012 5.00
		R931	0RH3301D622	3.3K OHM 1 / 10 W 2012 5.00
		R941	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R960	0RH1000D622	100 OHM 1 / 10 W 2012 5.00%
		R963	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%
		R964	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D
		R969	0RH1202D622	12K OHM 1 / 10 W 2012 5.00%-**LPL**
		R971	0RH1502D622	15K OHM 1 / 10 W 2012 5.00%-**LPL**
		R973	0RH1202D622	12K OHM 1 / 10 W 2012 5.00%-**AUO**
		R974	0RH4701D622	4.7K OHM 1 / 10 W 2012 5.00-**LPL**
		R976	0RH4701D622	4.7K OHM 1 / 10 W 2012 5.00-**AUO**
		R977	0RH4701D622	4.7K OHM 1 / 10 W 2012 5.00
		R978	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D-**LPL**
		R980	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D-**AUO**
		R981	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP-**AUO**
		R982	0RJ6801D477	6.8K OHM 1/10 W 1% 1608 R/T-**AUO**
		R983	0RH1002D622	10K OHM 1 / 10 W 2012 5.00%-**AUO**
		R984	0RJ2202D477	22K OHM 1/10 W 1% 1608 R/TP-**AUO**
		R998	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D-**AUO**
		R999	0RH0000D622	0 OHM 1 / 10 W 2012 5.00% D-**LPL**
		R100	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R1013	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R1015	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R102	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R1027	0RJ1202D677	12K OHM 1/10 W 5% 1608 R/TP
		R1028	0RJ2200D677	220 OHM 1/10 W 5% 1608 R/TP
		R108	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R109	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R110	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R1109	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R111	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R112	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R113	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R114	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R115	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R116	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R117	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R120	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R121	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R122	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R123	0RJ2202D677	22K OHM 1/10 W 5% 1608 R/TP
		R124	0RJ1500D677	150 OHM 1/10 W 5% 1608 R/TP
		R125	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/T

DATE: 2005. 09.19.

*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R127	0RJ3301D677	3.3K OHM 1/10 W 5% 1608 R/T
		R130	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R1300	0RJ6801D477	6.8K OHM 1/10 W 1% 1608 R/T
		R1302	0RJ2202D477	22K OHM 1/10 W 1% 1608 R/TP
		R1303	0RJ6801D477	6.8K OHM 1/10 W 1% 1608 R/T
		R1305	0RJ2202D477	22K OHM 1/10 W 1% 1608 R/TP
		R131	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R136	0RJ8202D677	82K OHM 1/10 W 5% 1608 R/TP
		R137	0RJ8202D677	82K OHM 1/10 W 5% 1608 R/TP
		R138	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R139	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R15	0RJ4700D677	470 OHM 1/10 W 5% 1608 R/TP
		R1500	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R152	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R153	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R155	0RJ2700D677	270 OHM 1/10 W 5% 1608 R/TP
		R157	0RJ2700D677	270 OHM 1/10 W 5% 1608 R/TP
		R159	0RJ2700D677	270 OHM 1/10 W 5% 1608 R/TP
		R16	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R160	0RJ1500D677	150 OHM 1/10 W 5% 1608 R/TP
		R161	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R163	0RJ1500D677	150 OHM 1/10 W 5% 1608 R/TP
		R164	0RJ1500D677	150 OHM 1/10 W 5% 1608 R/TP
		R17	0RJ2202D677	22K OHM 1/10 W 5% 1608 R/TP
		R173	0RJ3301D677	3.3K OHM 1/10 W 5% 1608 R/T
		R175	0RJ3301D677	3.3K OHM 1/10 W 5% 1608 R/T
		R18	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R205	0RJ0682D677	68 OHM 1/10 W 5% 1608 R/TP
		R207	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R209	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R210	0RJ2402D677	24K OHM 1/10 W 5% 1608 R/TP
		R211	0RJ5602D477	56K OHM 1/10 W 1% 1608 R/TP
		R213	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R214	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R218	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R220	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R237	0RJ0682D677	68 OHM 1/10 W 5% 1608 R/TP
		R238	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R239	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R240	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R241	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R244	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R245	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R246	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R247	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R248	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R249	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R250	0RJ2402D677	24K OHM 1/10 W 5% 1608 R/TP
		R251	0RJ5602D477	56K OHM 1/10 W 1% 1608 R/TP
		R253	0RJ1501D677	1.5K OHM 1/10 W 5% 1608 R/T
		R254	0RJ1501D677	1.5K OHM 1/10 W 5% 1608 R/T
		R256	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R257	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R303	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R317	0RJ2700D677	270 OHM 1/10 W 5% 1608 R/TP
		R319	0RJ2700D677	270 OHM 1/10 W 5% 1608 R/TP
		R321	0RJ2700D677	270 OHM 1/10 W 5% 1608 R/TP
		R323	0RJ1500D677	150 OHM 1/10 W 5% 1608 R/TP
		R326	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R329	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R34	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R35	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP

DATE: 2005. 09.19.

*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R356	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R357	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R358	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R359	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R385	0RJ6800D677	680 OHM 1/10 W 5% 1608 R/TP
		R387	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R390	0RJ6800D677	680 OHM 1/10 W 5% 1608 R/TP
		R392	0RJ6800D677	680 OHM 1/10 W 5% 1608 R/TP
		R393	0RJ6800D677	680 OHM 1/10 W 5% 1608 R/TP
		R4005	0RJ0472D677	47 OHM 1/10 W 5% 1608 R/TP
		R4006	0RJ0472D677	47 OHM 1/10 W 5% 1608 R/TP
		R4015	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R4016	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R4019	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R4020	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R4022	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R4023	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R4024	0RJ0472D677	47 OHM 1/10 W 5% 1608 R/TP
		R4027	0RJ3001D677	3K OHM 1/10 W 5% 1608 R/TP
		R4032	0RJ4700D677	470 OHM 1/10 W 5% 1608 R/TP
		R4033	0RJ4700D677	470 OHM 1/10 W 5% 1608 R/TP
		R449	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R450	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R451	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R47	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R48	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R50	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R500	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R5002	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R5007	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R5009	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R501	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R5013	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R5015	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R5016	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R5017	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R5019	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R5020	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R5021	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R504	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R51	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R515	0RJ4703D677	470K OHM 1/10 W 5% 1608 R/T
		R52	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R521	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R522	0RJ0332D677	33 OHM 1/10 W 5% 1608 R/TP
		R523	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R524	0RJ0332D677	33 OHM 1/10 W 5% 1608 R/TP
		R525	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R526	0RJ0332D677	33 OHM 1/10 W 5% 1608 R/TP
		R528	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R529	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R53	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R533	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R534	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R54	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R55	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R56	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R57	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R58	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R59	0RJ1211D477	1.21K OHM 1/10 W 1% 1608 R/
		R60	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R600	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP

DATE: 2005. 09.19.

*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R601	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R602	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R603	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R604	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R606	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R608	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R609	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R62	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R64	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R66	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R68	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R70	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R701	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R702	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP
		R706	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R71	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R711	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R717	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R718	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R72	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R720	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R721	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R722	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R727	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R728	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R73	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R731	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/T
		R739	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R740	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R751	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R754	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R757	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R758	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R759	0RJ0000D677	0 OHM 1/10 W 5% 1608 R/TP
		R79	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R800	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R801	0RJ0752D677	75 OHM 1/10 W 5% 1608 R/TP
		R807	0RJ0102D677	10 OHM 1/10 W 5% 1608 R/TP
		R808	0RJ0102D677	10 OHM 1/10 W 5% 1608 R/TP
		R81	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R852	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/T
		R853	0RJ4701D677	4.7K OHM 1/10 W 5% 1608 R/T
		R855	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R856	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R86	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R88	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R90	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R901	0RJ0472D677	47 OHM 1/10 W 5% 1608 R/TP
		R902	0RJ0472D677	47 OHM 1/10 W 5% 1608 R/TP
		R904	0RJ0472D677	47 OHM 1/10 W 5% 1608 R/TP
		R906	0RJ0472D677	47 OHM 1/10 W 5% 1608 R/TP
		R908	0RJ0822D677	82 OHM 1/10 W 5% 1608 R/TP
		R909	0RJ0822D677	82 OHM 1/10 W 5% 1608 R/TP
		R910	0RJ0822D677	82 OHM 1/10 W 5% 1608 R/TP
		R913	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R914	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R915	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R916	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R917	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R918	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R919	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R92	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP

DATE: 2005. 09.19.

*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R920	0RJ4990D477	499 OHM 1/10 W 1% 1608 R/TP
		R921	0RJ4990D477	499 OHM 1/10 W 1% 1608 R/TP
		R923	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R924	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R925	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R926	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R927	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R928	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R929	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R93	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R933	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R934	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R935	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R936	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R937	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R938	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R939	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R94	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R940	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R942	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R943	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R944	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R945	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R946	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R947	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R948	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R949	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R950	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R952	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R953	0RJ1002D677	10K OHM 1/10 W 5% 1608 R/TP
		R96	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R965	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R966	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R967	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R968	0RJ0222D677	22 OHM 1/10 W 5% 1608 R/TP
		R970	0RJ1001D677	1K OHM 1/10 W 5% 1608 R/TP-**LPL**
		R972	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R975	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R98	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		R99	0RJ1000D677	100 OHM 1/10 W 5% 1608 R/TP
		OTHERs		
		X4000	6202TTB001G	HC-49U SUNNY 12.288MHZ +/-
		X11	6202VDT002E	SX-1SMD SUNNY RADIAL 202500
		X500	6202VDT002J	SX-1 SUNNY 13.500000MHZ +/-
		X900	6202VDT002B	SX-1 SUNNY SC14.3MHZ +/- 30
		IC900	6620F00017A	CCSD-32T-SM WOOYOUNG 32P PL
		TU1000	6700VS0003E	TAEW-G053D LGIT MULTI VS PA
		IR BOARD		
		C1500	0CN1040K949	"0.1UF D 50V 80%,-20% F(Y5V)"
		L1500	0LA0102K119	10UH K 2.3*3.4 TP
		IR1500	6712000013A	TSOP4438SO1 VISHAY 38KHZ AN
		CONTROL BOARD		
		L1700	0LA0102K119	10UH K 2.3*3.4 TP
		R1700	0RN8200F409	820 1/6W 1% TA52
		R1701	0RN6200F409	620 1/6W 1% TA52
		R1702	0RN5100F409	510 OHM 1/6 W 1.00% TA52

DATE: 2005. 09.19.

*S	*AL	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
		R1703	0RN4300F409	430 OHM 1/6 W 1.00% TA52
		R1704	0RN3300F409	330 1/6W 1% TA52
		R1705	0RN2700F409	270 1/6W 1% TA52
		R1706	0RN2701F409	2.7K OHM 1/6 W 1.00% TA52
		SW1700	140-313A	TACT 2LEAD 100G(TA) LG C&D
		SW1701	140-313A	TACT 2LEAD 100G(TA) LG C&D
		SW1702	140-313A	TACT 2LEAD 100G(TA) LG C&D
		SW1703	140-313A	TACT 2LEAD 100G(TA) LG C&D
		SW1704	140-313A	TACT 2LEAD 100G(TA) LG C&D
		SW1705	140-313A	TACT 2LEAD 100G(TA) LG C&D
		SW1706	140-313A	TACT 2LEAD 100G(TA) LG C&D
		LED&P/SW BOARD		
		C1600	0CN1040K949	"0.1UF D 50V 80%,-20% F(Y5V)"
		L1600	0LA0102K119	10UH K 2.3*3.4 TP
		Q1601	0TR319809AA	KTC3198(KTC1815) KEC TP TO9
		Q1602	0TR319809AA	KTC3198(KTC1815) KEC TP TO9
		Q1603	0TR319809AA	KTC3198(KTC1815) KEC TP TO9
		R1600	0RD3301Q609	3.30K 1/4W(3 5% TA52
		R1601	0RD2701Q609	2.7K OHM 1/4 W(3.4) 5.00% T
		R1602	0RD2700Q609	270 1/4W(3 5% TA52
		R1603	0RD1001Q609	1K OHM 1/4 W(3.4) 5.00% TA5
		R1604	0RD1001Q609	1K OHM 1/4 W(3.4) 5.00% TA5
		R1605	0RD1001Q609	1K OHM 1/4 W(3.4) 5.00% TA5
		R1606	0RD1500Q609	150 1/4W(3 5% TA52
		SW1600	140-313A	TACT 2LEAD 100G(TA) LG C&D
		LED1600	0DLBE0128AA	BRIGHT LED ELECTRONICS BL-B
		SIDE A/V BOARD		
		C2006	0CN4710K519	470PF D 50V 10% B(Y5P) TA52
		C2007	0CN4710K519	470PF D 50V 10% B(Y5P) TA52
		R2001	0RD0752Q609	75 1/4W(3 5% TA52
		R2002	0RD0752Q609	75 1/4W(3 5% TA52
		R2003	0RD0752Q609	75 1/4W(3 5% TA52
		R2004	0RD0752Q609	75 1/4W(3 5% TA52
		R2005	0RD0752Q609	75 1/4W(3 5% TA52
		R2006	0RD4703Q609	470K 1/4W(3 5% TA52
		R2007	0RD4703Q609	470K 1/4W(3 5% TA52

ML041A
RZ-23LZ55

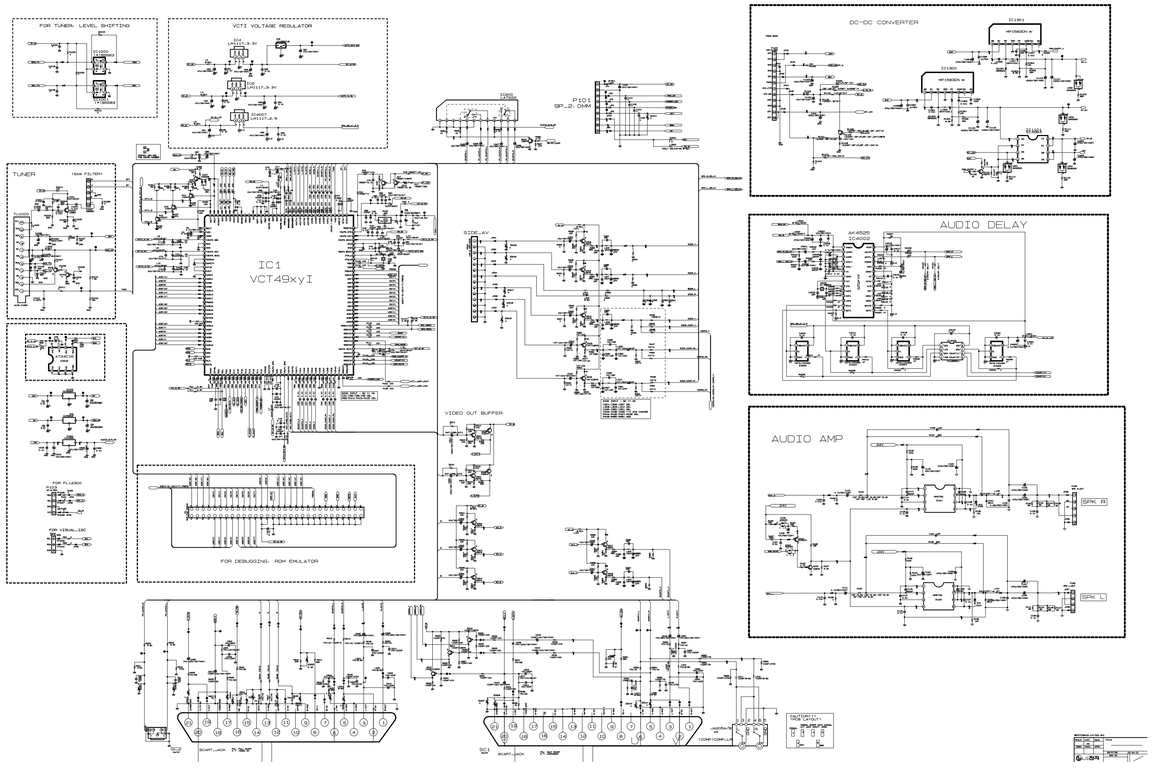

ML041A
RZ-23LZ55

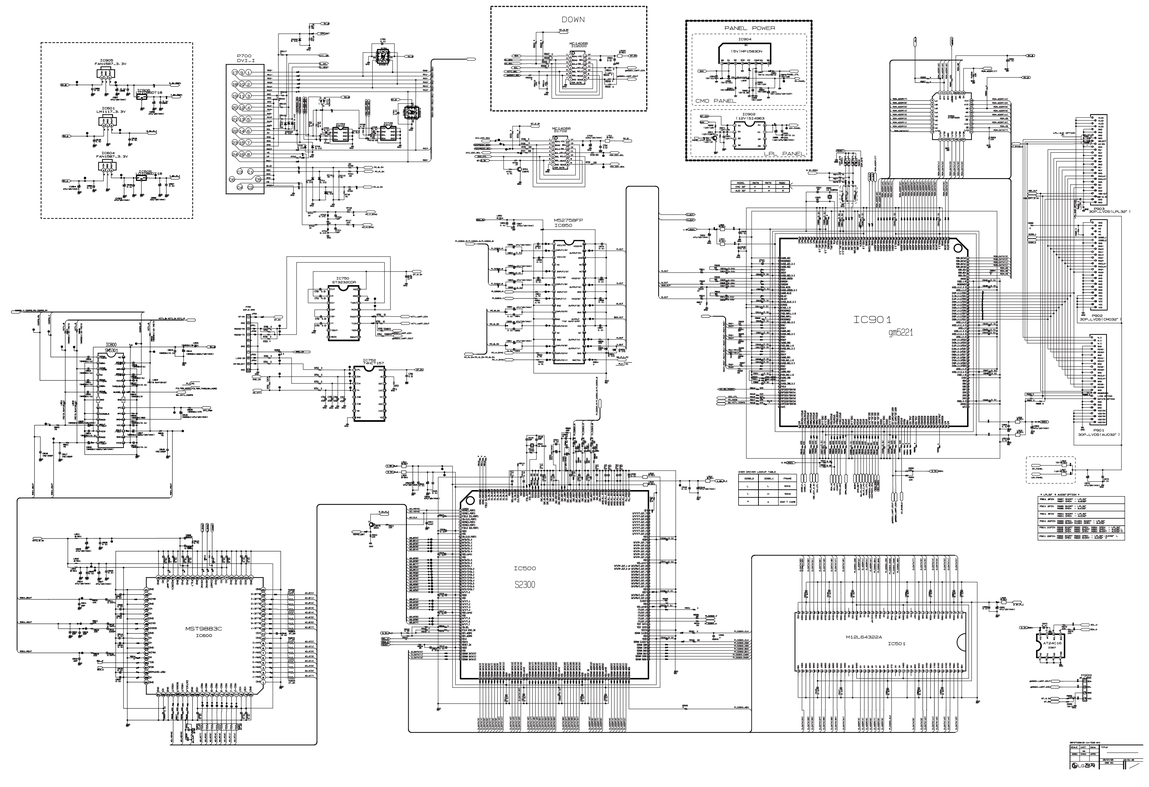

ML041A
RZ-32LZ55

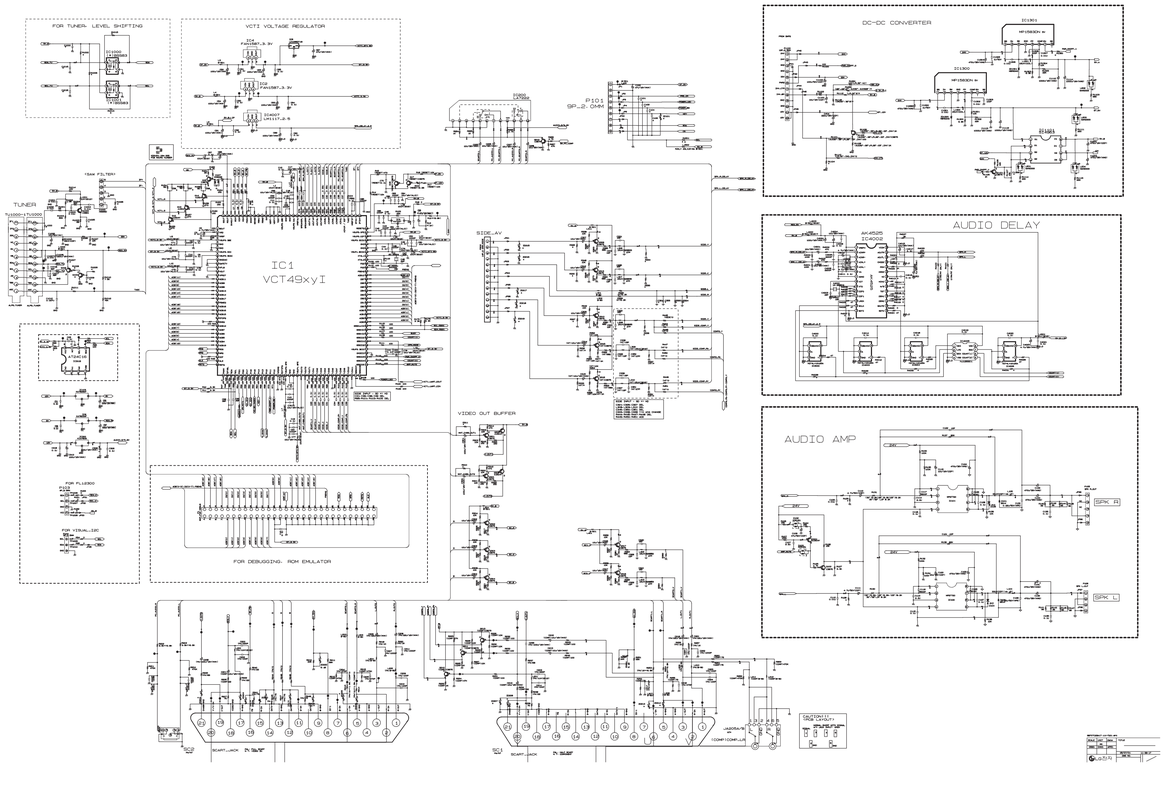

ML041A
RZ-23/26/32LZ55

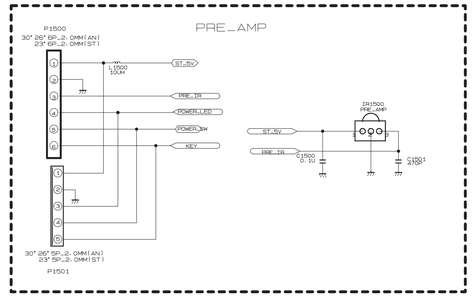

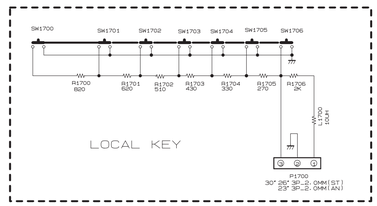

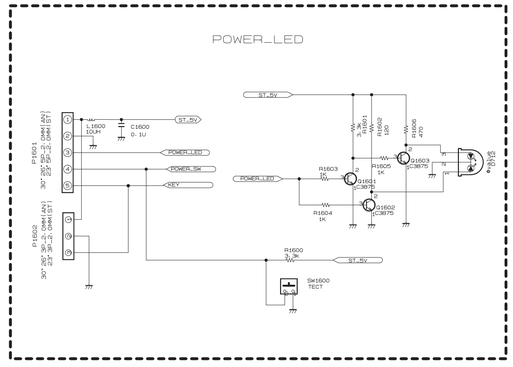

ML041A_EDR-c1r/001.smt

SCALE	UNIT	Date	TITLE
	mm		
DSGD.	CHKD.	APPD.	
		05/06/30	08:30:04
LG전자		DWG NO.	

ML041A
RZ-32LZ55

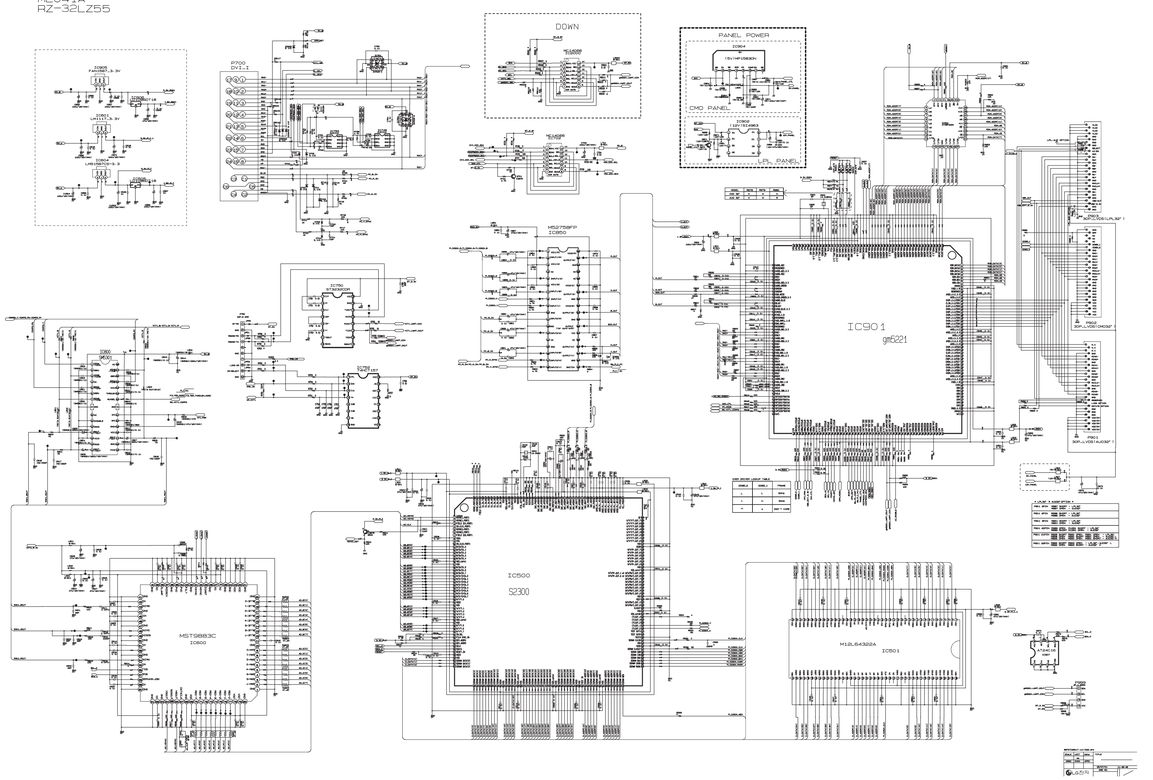

ML041A
RZ-23/26/32LZ55

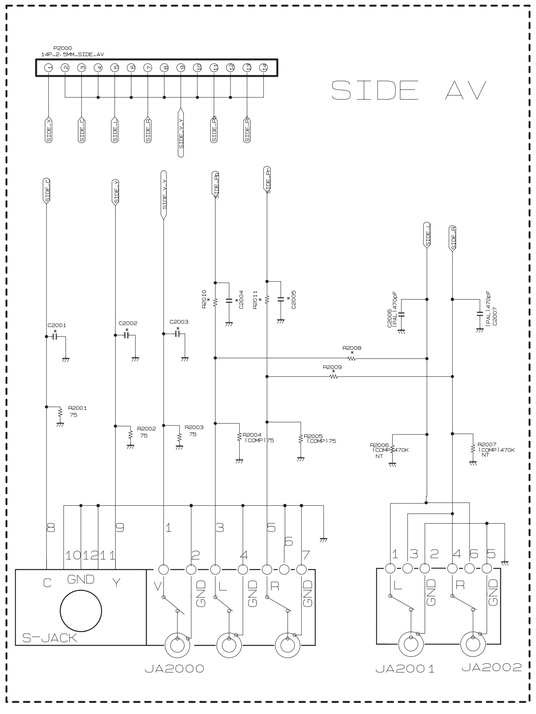

ML041A_EDR-c1r/003.smt

SCALE	UNIT	Date	TITLE
	mm		
DSGD.	CHKD.	APPD.	
		05/06/30	08:31:45
LG전자		DWG NO.	

P/NO : 38289S0022D

Sep., 2005
Printed in Korea